


# START Downlight 175 IP54 1600lm 840

Item No: 0030327

**SYLVANIA**


**START**<sup>TM</sup>

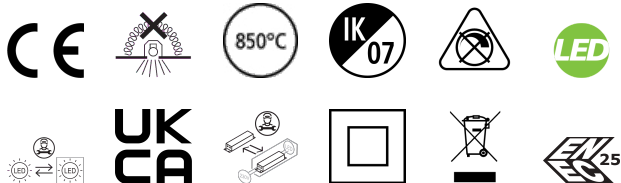

Ceiling recessed LED downlight IP54 (from the front), perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 15W, 4000K, Driver Current: 390mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP54 from the front, IK07, (HxW) 55x195mm, Class 2, 220-240V. Meets TP(a) requirements.

## Technical Assets


### Dimensions (mm)

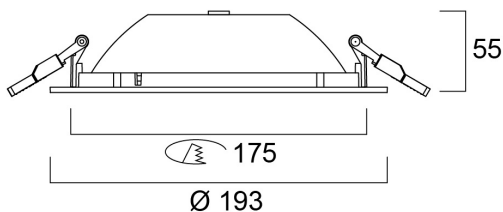

### Photometrics

Distance [m]	Cone diameter [m]	E <sub>0</sub> ' [lx]	E <sub>100</sub> ' [lx]
0.5	0.82	321	36
1.0	1.65	80	18
1.5	2.47	33	12
2.0	3.30	20	8
2.5	4.12	13	5
3.0	4.95	9	4

Distance [m]    Cone diameter [m]    Illuminance [lx]  
 — C0 - C180 (Half beam angle: 79.0°)



# START Downlight 175 IP54 1600lm 840

Item No: 0030327

**SYLVANIA**

## General data

Product name	START Downlight 175 IP54 1600lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
ETIM Class	EC001744
E-number FI	4278149
Warranty	5 years

## Optical data

Useful luminous flux ( $\Phi_{use}$ )	1525
Fixture luminous flux (lm)	1600
Luminous flux (lm)	1600
Luminaire efficacy (lm/W)	110
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0

## Electrical data

Total power consumption (W)	14.5
Current (A)	0.065
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) $\leq$ xx.x %	20
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
No. Of switching cycles before premature failures	>100000
Dimmable	No
Dimming method	N/A
Drive current (mA)	400
Inrush Current (A)	7.52
Inrush Duration ( $\mu$ s)	830
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	50
Max. products per 13A C Breaker	61
Max. products per 16A C Breaker	74
Max. products per 20A C Breaker	86
Max. products per 10A B Breaker	40
Max. products per 13A B Breaker	49
Max. products per 16A B Breaker	59
Max. products per 20A B Breaker	69
Connectable conductor cross section - Min (mm <sup>2</sup> )	0.5
Connectable conductor cross section - Max (mm <sup>2</sup> )	1.5

# START Downlight 175 IP54 1600lm 840

Item No: 0030327

**SYLVANIA**

## Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

## Physical data

Housing colour	RAL 9010 - Pure white
IP rating	IP54/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	193
Weight (kg)	0.371
Recessed Depth (mm)	150

## Packaging

Product EAN number	5410288303277
Packaging single length / height (cm)	20.0
Packaging single width (cm)	20.0
Packaging single depth (cm)	6.8
DUN14 (inner)	15410288303274
Units per outer package	16
Packaging outer length / height (cm)	56.8
Packaging outer width (cm)	42.0
Packaging outer depth (cm)	22.5

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-10-40