


## Insaver HO Topper LED II 225

*Insaver HO Topper LED II 225 RO 25W WW*  
3033948



### Product features

- IP44 from the front round LED downlight with outputs of up to 2,289lm and an efficacy of up to 99lm/W. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.

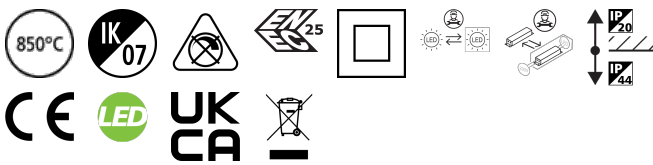

### PRODUCT OVERVIEW

Product name	Insaver HO Topper LED II 225 RO 25W WW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality
ETIM Class	EC001744
E-number SE	7465636
Warranty	5 years
Fixture luminous flux (lm)	2071
Luminaire efficacy (lm/W)	83
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	74
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971339489

## Insaver HO Topper LED II 225

*Insaver HO Topper LED II 225 RO 25W WW*  
3033948

### DATA TABLE

#### General data

Product name	Insaver HO Topper LED II 225 RO 25W WW
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality
Operating temperature range (°C)	-10°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number SE	7465636
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	2071
Luminaire efficacy (lm/W)	83
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	74
Distribution type	Symmetric
Glare control	< 23
Photobiological Risk Group	RG0

#### Electrical data

Total power consumption (W)	25
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Drive current (mA)	630
Inrush Current (A)	6.44
Inrush Duration (µs)	830
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz

## Insaver HO Topper LED II 225

*Insaver HO Topper LED II 225 RO 25W WW*  
3033948

LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	12
Max. products per 13A C Breaker	16
Max. products per 16A C Breaker	20
Max. products per 20A C Breaker	25

### Lifetime data

Lifespan L70 B50	100000
Lifespan L80 B20	74000
Lifespan L90 B10	34000

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	High-gloss
Nominal Product Height (mm)	65
Nominal Product Diameter (mm)	240
Cutout Dimensions (W x L in mm or Diameter in mm)	225
Weight (kg)	0.842
Recessed Depth (mm)	150

### Packaging

Single packaging type	Carton
Product EAN number	8711971339489
Packaging single length / height (cm)	27.2
Packaging single width (cm)	27.3
Packaging single depth (cm)	8.0
DUN14 (outer)	18711971339486
Units per outer package	12
Packaging outer length / height (cm)	56.6
Packaging outer width (cm)	56.7
Packaging outer depth (cm)	28.0


### Safety data

Optimal operating condition (°C)	-10-25
----------------------------------	--------

## PHOTOMETRY

## Insaver HO Topper LED II 225

*Insaver HO Topper LED II 225 RO 25W WW*  
3033948

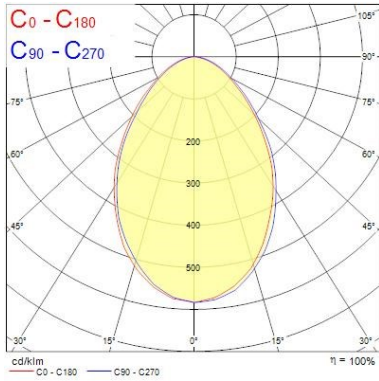

### TECHNICAL DRAWINGS

