

## START DOWNLIGHT 150 IP44

START Downlight 150 IP44 1200lm 830

0030324



### Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 45mm product depth and 150mm cutout. Ideal replacement for 1x26W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 12W, 3000K, Driver Current: 290mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 45x165mm, Class 2, 220-240V. Meets TP(a) requirements.




### PRODUCT OVERVIEW

|                                   |   |
|-----------------------------------|---|
| Product name                      | START Downlight 150 IP44 1200lm 830       |
| Technology                        | LED                                       |
| Cap/Base                          | N/A                                       |
| Housing                           | Aluminium                                 |
| Mount                             | Ceiling recessed mounting                 |
| General application               | Hospitality, Logistics & Industry, Office |
| ETIM Class                        | EC001744                                  |
| E-number FI                       | 4278145                                   |
| Warranty                          | 5 years                                   |
| Useful luminous flux (Fuse)       | 1100                                      |
| Fixture luminous flux (lm)        | 1200                                      |
| Luminous flux (lm)                | 1200                                      |
| Luminaire efficacy (lm/W)         | 100                                       |
| LOR (%)                           | 100                                       |
| Correlated colour temperature (k) | 3000                                      |
| Light colour                      | Warm White                                |
| CRI (Ra)                          | 80  |
| Colour Variation Initial (SDCM)   | SDCM3                                     |
| Beam Angle (°)                    | 74  |
| Glare control                     | < 25                                      |
| Photobiological Risk Group        | RG0                                       |
| Total power consumption (W)       | 12  |
| Electrical protection             | Class II                                  |
| Control gear type                 | LED driver constant current               |
| Dimmable                          | No  |
| Dimming method                    | N/A                                       |
| LED Flickering Rate               | Ultra low (5% or less)                    |
| Housing colour                    | RAL 9010 - Pure white                     |
| IP rating                         | IP44/20                                   |
| IK rating                         | IK07                                      |
| Product EAN number                | 5410288303246                             |

## START DOWNLIGHT 150 IP44

START Downlight 150 IP44 1200lm 830  
0030324

### PHOTOMETRY

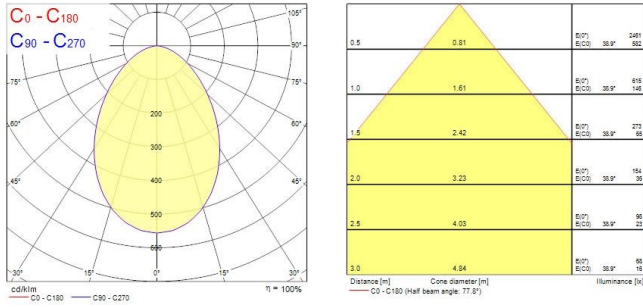

### TECHNICAL DRAWINGS

