

### Features

- Surface or Suspended LED Linear luminaire with Micro Prismatic Optic, Dimensions: 1150mm x 87mm x 87mm, Direct, White Body, DALI Dimmable (Switch-Dim), Emergency 3 hours maintained, Neutral White LED (4000K), 2890lm, 35W, 83lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse), Low LED Flicker (+/-5%), UGR<21, L90B10 at 50,000 hours, Electric Class1, Glow Wire Test 850°C

### Product Overview


<b>Product name</b>	RANA LINEAR S 3KLM NW MPO D EMPRO
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	Steel
<b>Mount</b>	Ceiling surface mounting, Suspended
<b>Fixture rating</b>	Enclosed
<b>Environment</b>	Internal
<b>General application</b>	Office, Hospitality, Retail, Education
<b>ETIM Class</b>	EC002892
<b>Fixture luminous flux (lm)</b>	2890
<b>Luminaire efficacy (lm/W)</b>	82.57
<b>LOR (%)</b>	100
<b>Correlated colour temperature (k)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Consistency (SDCM)</b>	3
<b>Glare control</b>	< 21
<b>Photobiological Risk Group</b>	RG0
<b>Luminous flux (emergency) (lm)</b>	447

Light your world

## RANA LINEAR S 3KLM NW MPO D EMPRO 0051259

Total power consumption (W)	35
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL9016
IP rating	IP20
IK rating	IK07
Product EAN number	5410288512594
Warranty	5 years
Dimming method	DALI

### Photometry

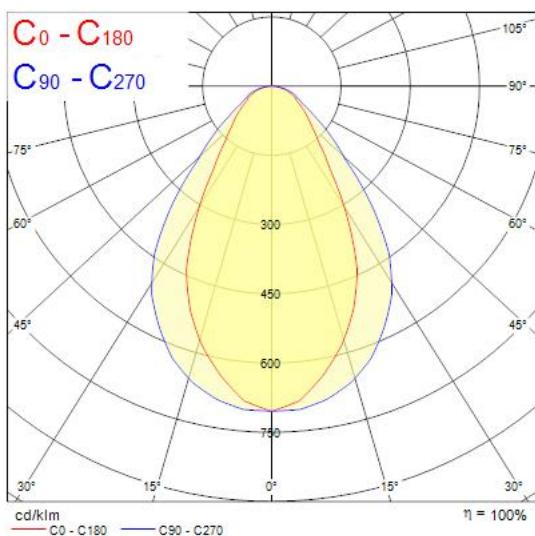

### Technical drawings

