


2-conductor shield terminal block; 6 mm²; suitable for Ex e II applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 6,00 mm²; white



https://www.wago.com/2006-1208

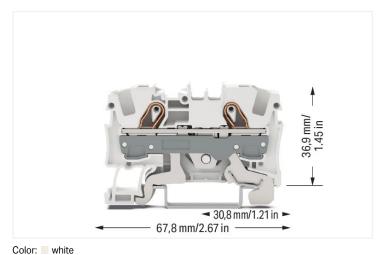

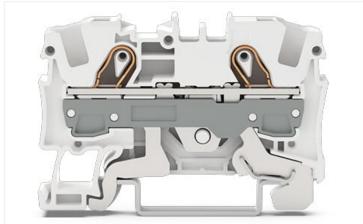

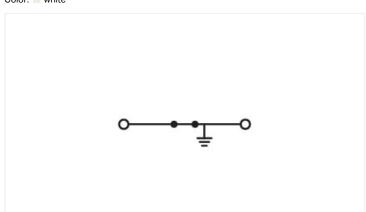

Similar to illustration

Electrical data

Ratings per	IEC/EN 60947-7-2			
Overvoltage category	III	III	II	
Pollution degree	3	2	2	
Nominal voltage	-	-	-	
Rated surge voltage	-	-	-	
Rated current	-	-	-	

Connection data		
Connection points	2	
Total number of potentials	1	
Number of levels	1	
Number of jumper slots	2	

Connection 1	
Connection technology	Push-in CAGE CLAMP®
Actuation type	Operating tool
Connectable conductor materials	Copper
Nominal cross-section	6 mm²
Solid conductor	0.5 10 mm² / 20 8 AWG
Solid conductor; push-in termination	2.5 10 mm² / 14 8 AWG
Fine-stranded conductor	0.5 10 mm² / 20 8 AWG
Fine-stranded conductor; with insulated ferrule	0.5 6 mm² / 20 10 AWG

https://www.wago.com/2006-1208



Connection 1

Fine-stranded conductor; with ferrule;

push-in termination

2.5 ... 6 mm² / 16 ... 10 AWG

Note (conductor cross-section)

Depending on the conductor characteristic, a conductor with a smaller crosssection can also be inserted via push-in

termination.

Strip length

13 ... 15 mm / 0.51 ... 0.59 inches

Wiring direction

Front-entry wiring

Р	hysi	cal	da	ta

 Width
 7.5 mm / 0.295 inches

 Height
 57.5 mm / 2.26 inches

 Depth from upper-edge of DIN-rail
 32.9 mm / 1.295 inches

Mechanical data

Mounting type DIN-35 rail

Marking level Center/side marking

Material data

Note (material data)

Information on material

specifications can be found here

Color

white

Material group
Insulation material

Polyamide (PA66)

Flammability class per UL94

V0

Fire load

0.178 MJ

Weight

17.3 g

Environmental requirements

Processing temperature

-35 ... +85 °C

Continuous operating temperature

-60 ... +105 °C

Commercial data

Product Group 22 (TOPJOBS) eCl@ss 10.0 27-14-11-41 eCl@ss 9.0 27-14-11-41 ETIM 8.0 EC000901 ETIM 7.0 EC000901 PU (SPU) 50 pcs Packaging type Box Country of origin DE 4050821189121 85369010000 Customs tariff number

https://www.wago.com/2006-1208



Environmental Product Compliance

RoHS Compliance Status Compliant,No Exemption

Approvals / Certificates

General approvals







Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	IEC 60947	71-122840 REV.1
CCA DEKRA Certification B.V.	EN 60947	NTR NL 7925/1
CSA DEKRA Certification B.V.	C22.2 No. 158	1543858
UL UL International Germany GmbH	UL 1059	E45172

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Railway WAGO GmbH & Co. KG	-	Railway Ready
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications





Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	EN 60947	20-HG1941090-PDA
DNV GL Det Norske Veritas, Ger- manischer Llovd	-	TAE00001V2

Approvals for hazardous areas

EHC Ex

Approval	Standard	Certificate Name
CCCEx CQST/CNEx	GB/T 3836.3	2020312313000231
EAC Brjansker Zertifizierungs- stelle	TP TC 012/2011	RU C-DE.AM02. B.00127/19 (Ex e IIC Gb U)

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2006-1208




Documentation

Additional Information

Technical Section pdf 2240.62 KB

Bid Text			
2006-1208	17.04.2019	xml 3.75 KB	$\underline{\downarrow}$
2006-1208	17.04.2019	docx 14.73 KB	\perp



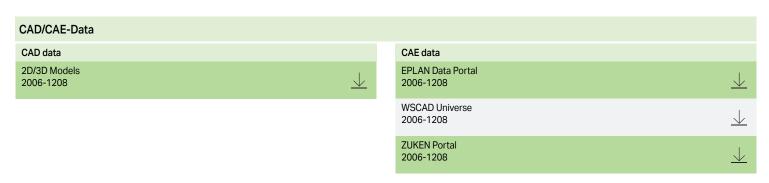



1.2.1 Cover 1.2.1.1 Cover

Item No.: 2006-191 Lockout cap; for wire insertion and actuating opening; gray

1.2.2 DIN-rail

1.2.2.1 Mounting accessories			
Item No.: 210-196 Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm	Item No.: 210-198 Copper carrier rail; 35 x 15 mm; 2.3 mm	Item No.: 210-508 Steel carrier rail; 35 x 15 mm; 1.5 mm	Item No.: 210-197 Steel carrier rail; 35 x 15 mm; 1.5 mm

thick; 2 m long; unslotted; according to thick: 2 m long: unslotted: similar to EN thick: 2 m long; slotted; galvanized; simithick; 2 m long; slotted; similar to EN 60715; silver-colored lar to EN 60715; silver-colored 60715; silver-colored EN 60715; copper-colored Item No.: 210-506 Item No.: 210-114 Item No.: 210-118 Item No.: 210-115 Steel carrier rail; 35 x 15 mm; 1.5 mm Steel carrier rail; 35 x 15 mm; 1.5 mm Steel carrier rail; 35 x 15 mm; 2.3 mm Steel carrier rail; 35 x 7.5 mm; 1 mm thick; thick; 2 m long; unslotted; galvanized; sithick; 2 m long; unslotted; similar to EN thick; 2 m long; unslotted; according to 2 m long; slotted; according to EN 60715; milar to EN 60715; silver-colored EN 60715; silver-colored "Hole width 18 mm; silver-colored 60715; silver-colored



https://www.wago.com/2006-1208



1.2.3 Ferrule

1.2.3.1 Ferrule



Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

Item No.: 216-263

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

Item No.: 216-264

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

Item No.: 216-266

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray

Item No.: 216-208

Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow

1.2.4 Installation

1.2.4.1 Cover



Item No.: 709-156

Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

1.2.4.2 Cover carrier



Item No.: 709-169

Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.2.5 Jumper

1.2.5.1 Jumper



Item No.: 2006-402

Jumper; 2-way; insulated; light gray



Jumper; 3-way; insulated; light gray

Item No.: 2006-404

Jumper; 4-way; insulated; light gray

Item No.: 2006-405

Jumper; 5-way; insulated; light gray



Item No.: 2006-433

Jumper; from 1 to 3; insulated; light gray

Item No.: 2006-434

Jumper; from 1 to 4; insulated; light gray

Item No.: 2006-435

Jumper; from 1 to 5; insulated; light gray

Item No.: 2006-405/011-000

Star point jumper; 3-way; insulated; light gray



1.2.6 Marking

1.2.6.1 Group marker carrier



Item No.: 2009-191

Group marker carrier; gray



Item No.: 2009-192

Group marker carrier; gray



Item No.: 2009-193

Group marker carrier; gray

1.2.6.2 Marker

Item No.: 2009-145/000-006

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue

Item No.: 2009-145/000-007

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm;

Item No.: 2009-145/000-023

Item No.: 2009-145

plain; snap-on type; white

Item No.: 248-501/000-023

Item No.: 248-501/000-024

Item No.: 793-5501/000-007

Item No.: 793-5501/000-005

5.2 mm; plain; snap-on type; red

Item No.: 793-501/000-006

ble; plain; snap-on type; blue

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green

Mini-WSB Inline; for Smart Printer; 1700

pieces on roll; stretchable 5 - 5.2 mm;

Mini-WSB marking card; as card; not

Mini-WSB marking card; as card; not

stretchable; plain; snap-on type; violet

WMB marking card; as card; for terminal

block width 5 - 17.5 mm; stretchable 5 -

WMB marking card; as card; for terminal

block width 5 - 17.5 mm; stretchable 5 -

WMB marking card; as card; not stretcha-

5.2 mm; plain; snap-on type; gray

stretchable; plain; snap-on type; green

Item No.: 2009-145/000-012

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

Item No.: 2009-145/000-005

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red



Item No.: 248-501/000-006

Mini-WSB marking card; as card; not stret-



chable; plain; snap-on type; blue



Item No.: 248-501/000-012

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange



Item No.: 248-501/000-002

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow



Item No.: 793-5501/000-017

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; light green



Item No.: 793-5501

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; white



Item No.: 793-501/000-023

WMB marking card; as card; not stretchable; plain; snap-on type; green



Item No.: 793-501/000-024

WMB marking card; as card; not stretchable; plain; snap-on type; violet



Item No.: 2009-115/000-007

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray

plain; snap-on type; gray

Item No.: 2009-145/000-024

Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



Item No.: 248-501/000-007

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 248-501/000-005

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 793-5501/000-006

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; blue



Item No.: 793-5501/000-012

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; orange



Item No.: 793-5501/000-002

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; yellow



Item No.: 793-501/000-017

WMB marking card; as card; not stretchable; plain; snap-on type; light green



ble; plain; snap-on type; white

Item No.: 2009-115/000-023

snap-on type; green

Item No.: 793-501

WMB marking card; as card; not stretcha-

WMB-Inline; for Smart Printer; 1500 pie-

ces on roll; stretchable 5 - 5.2 mm; plain;



Item No.: 793-501/000-012

WMB marking card; as card; not stretchable; plain; snap-on type; orange



Item No.: 793-501/000-002

WMB marking card; as card; not stretchable; plain; snap-on type; yellow



Item No.: 2009-115/000-017

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; light green

Item No.: 2009-145/000-002 Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



Item No.: 248-501/000-017

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



Item No.: 248-501

Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 793-5501/000-023

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; green



Item No.: 793-5501/000-024

WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 -5.2 mm; plain; snap-on type; violet



Item No.: 793-501/000-007

WMB marking card; as card; not stretchable; plain; snap-on type; gray



Item No.: 793-501/000-005

WMB marking card; as card; not stretchable; plain; snap-on type; red



Item No.: 2009-115/000-006

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



Item No.: 2009-115/000-012

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange

https://www.wago.com/2006-1208



1.2.6.2 Marker

*

WMB-Inline; for Smart Printer; 1500 pie-

ces on roll; stretchable 5 - 5.2 mm; plain;

Item No.: 2009-115

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

Item No.: 2009-115/000-002

WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow

1.2.6.3 Marker carrier

snap-on type; violet



Item No.: 2009-198 Adaptor; gray

1.2.6.4 Marking strip



Item No.: 2009-110

Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.2.7 Protective warning marker

1.2.7.1 Cover



Item No.: 2006-115

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

1.2.8 Screwless end stop

1.2.8.1 Mounting accessories



· 111

Item No.: 249-117

Screwless end stop; 10 mm wide; for DIN-rail 35×15 and 35×7.5 ; gray

Item No.: 249-116

Screwless end stop; 6 mm wide; for DINrail 35 x 15 and 35 x 7.5; gray

1.2.9 Test and measurement

1.2.9.1 Testing accessories



Modular TOPJOB®S connector; modular;

for jumper contact slot; 1-pole; 6,00 mm²;

commoned terminal blocks; gray

Item No.: 2006-549
Spacer module; modular; e.g., for bridging

Item No.: 2009-174

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray

Item No.: 210-136

Test plug; 2 mm \emptyset ; with 500 mm cable; red

Item No.: 2009-182

Item No.: 2006-511

gray

Testing tap; for max. 2.5 mm²; tool-free connection for individual test wires 0.08 - 2.5 mm; gray

https://www.wago.com/2006-1208



1.2.10 Tool

1.2.10.1 Operating tool



Item No.: 210-721

Operating tool; Blade: 5.5 x 0.8 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination



All conductor types at a glance



Push-in termination of solid and ferruled conductors



Inserting a conductor via push-in termination:

Solid conductors with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.



Inserting a conductor via operating tool:

Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool.


Advantage:

To open the clamp, the operating tool is inserted vertically. The conductor entry is less than 15 degrees for easier wiring.

Commoning



Insert push-in type jumper bar and push down until it hits backstop.



Removing a push-in type jumper bar:

Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper.

Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.

Commoning



This star point jumper has been specially developed to create a "star point" and is used on motor terminal boards equipped with Rail-Mount Terminal Blocks TOPJOB® S.

https://www.wago.com/2006-1208



Testing



The modular TOPJOB® S connectors also connect conductors of the same size as the terminal blocks being used.



TOPJOB® S Connectors with a 2 mm Ø test socket for testing voltage via 2-pole voltage tester



Rail-mount terminal block assembly for electric motor wiring



Test plug adapter (2009-174, CAT I) for 4 mm Ø plugs – compatible with 2000 to 2016 Series



Testing tap (2009-182) for tool-free connection of test cables up to 2.5 mm² (12 AWG) – compatible with 2000 to 2016 Series

Marking



Snapping WMB Inline markers into marker slots.





TOPJOB® S 2009-193 Group Marker Carrier (equipped with a marking strip) for all 2001 to 2016 Series TOPJOB® S Rail-Mount Terminal Blocks
Do not use on an end plate!

Subject to changes. Please also observe the further product documentation!