# Lumiance

Insaver HO Topper LED II 225 RO 25W NW
**3033949**

## Features

• IP44 from the front round LED downlight with outputs of up to 2,289lm and an efficacy of up to 99lm/W. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.

## Product Overview

| | |
|---|---|
| **Product name** | Insaver HO Topper LED II 225 RO 25W NW |
| **Technology** | LED |
| **Cap/Base** | N/A |
| **Housing** | Aluminium |
| **Mount** | Ceiling recessed mounting |
| **Environment** | Interior |
| **E-number SE** | 7465634 |
| **Fixture luminous flux (lm)** | 2289 |
| **Luminaire efficacy (lm/W)** | 92 |
| **LOR (%)** | 100 |
| **Colour temperature (K)** | 4000 |
| **Light colour** | Neutral White |
| **CRI (Ra)** | 80 |
| **Colour Variation Initial (SDCM)** | 3 |
| **Glare control** | < 24 |
| **Photobiological Risk Group** | RG0 |
| **Total power consumption (W)** | 25 |
| **Electrical protection** | Class II |
| **Control gear type** | LED driver constant current |
| **LED Flickering Rate** | Ultra low (5% or less) |

Light your world

© Feilo Sylvania | Date Printed:06.02.2024

Lumiance

# Insaver HO Topper LED II 225 RO 25W NW
**3033949**

| | |
|---|---|
| **Housing colour** | RAL 9003 - Signal white |
| **IP rating** | IP44/20 |
| **IK rating** | IK07 |
| **Product EAN number** | 8711971339496 |
| **Warranty** | 5 years |

## Photometry

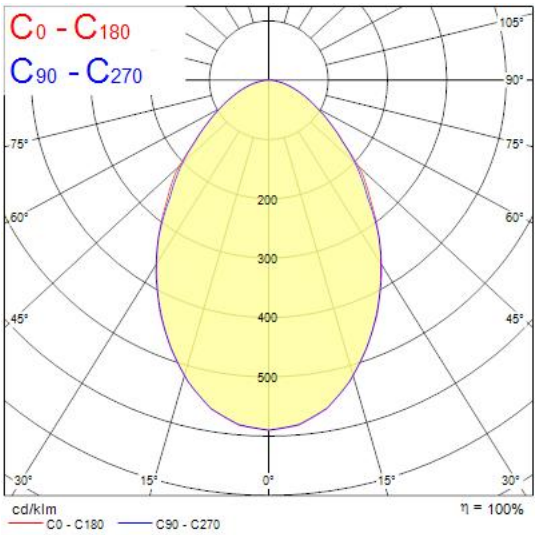


## Technical drawings

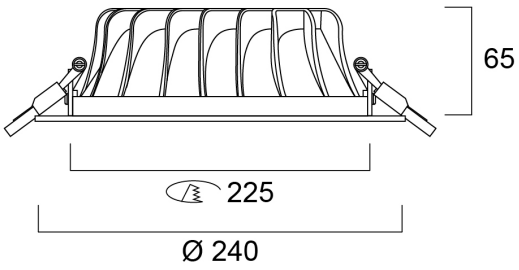


Light your world