Product data sheet Spirotech

Product name

SpiroTop -½” -St.Steel -HighT+P

Article number

AB050/R004

Product properties


A stainless steel air vent for high-temperature and high-pressure systems (max. 200 °C, max. 25 bar) with a ½” connection

- For high temperature and high-pressure system environments
- Special valve construction ensures valve is closed completely
- Long lasting valve seat
- Solid plastic (TPX), robust floats which cannot rupture
- Applicable with 50/50 Ethylene Glycol / Water (Volume)
- Large air gap between the valve and the water (at least 40 mm) prevents valve contamination and leaks
- ½” connection prevents pipette effect

Product image



Product dimensions

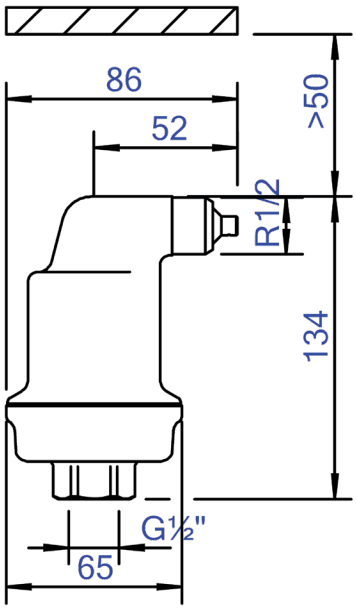

Product data sheet Spirotech

ETIM product data

Height	134 mm
Housing material	Stainless steel
With leakage protection	No
With air intake barrier	No
Angle connection	No
Housing material quality	Stainless steel 316 (1.4401)
Nominal diameter	1/2 inch (15)

Material float	Plastic
Max. medium temperature (continuous)	200 °C
Max. glycol mixture	50 %
Lockable	No
Max. operating pressure at 20 °C	25 bar
Material quality float	Polymethylpentene (PMP)

Disclaimer
This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.