


Isoline DALI

ISOLINE 3380MM 4K DASY DA 8C
0042538



Product features

- Isoline LED linear DALI dimmable luminaire for industrial and commercial applications. 3380 mm length with double asymmetrical optics provide homogenous light distribution for wide, shelf areas. Suitable for DALI Dimming. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <25, 3 SDCM. 112 W power consumption, 16600 lm luminous flux, 147 lm/W efficacy, 3380 mm x 62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, DC 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.

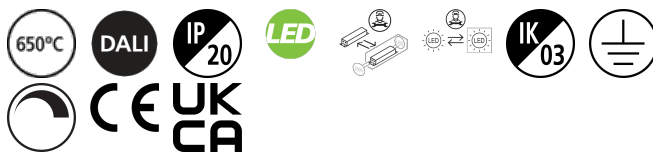


PRODUCT OVERVIEW

Product name	ISOLINE 3380MM 4K DASY DA 8C
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Useful luminous flux (Fuse)	16600
Fixture luminous flux (lm)	16600
Luminous flux (lm)	16500
Luminaire efficacy (lm/W)	147
Correlated colour temperature (k)	4000
Colour Code	840
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	112
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425382

Isoline DALI
ISOLINE 3380MM 4K DASY DA 8C
0042538

PHOTOMETRY

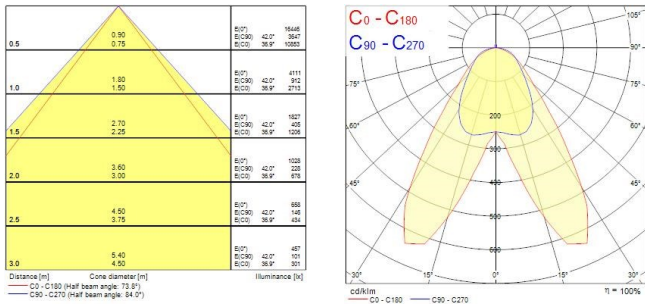

TECHNICAL DRAWINGS

