

# Product data sheet Spirotech

## Product name


## SpiroVent Solar -22mm -Uni -AutoClose -HighT

## Product properties

A brass (microbubble) deaerator - AutoClose for Solar & high-temperature systems (max. 180 °C) with a 22 mm - 1½" universal connection

- Specially developed for Solar (high temperature) installations
- Applicable with max. 20% - 50% Ethylene Glycol and water (Volume)
- Removes microbubbles, circulating and trapped air
- Greatly reduces commissioning times
- Minimal constant pressure drop
- No unnecessary shutdown
- Long lasting valve seat
- Universal connection
- Connection diameters from 22 mm to 1½" (G1½)
- Prevents stagnation
- Solar fluid will not prematurely degenerate
- System will not boil dry via the deaerator
- No more climbing the roof to deaerate
- Permanent air-free, efficient installation
- Suitable for new and existing installations

## Product dimensions

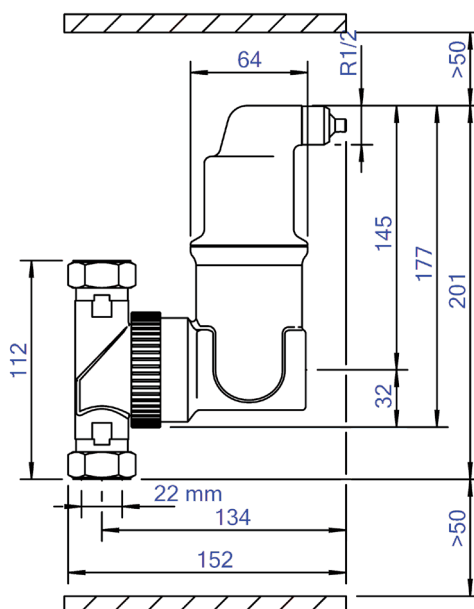

## Article number

**UA022WFBA08**

## Product image



# Product data sheet Spirotech

## ETIM product data

|                                 |                     |
|---------------------------------|---------------------|
| Housing material                | Brass               |
| With drain tap                  | No                  |
| Housing material quality        | Ms 58               |
| Backwash filter                 | No                  |
| Medium temperature (continuous) | 0 - 180 °C          |
| Max. operating pressure         | 10 bar              |
| Kvs value                       | 9.07 m³/h           |
| Variable flow direction         | No                  |
| With insulation                 | No                  |
| Separator type                  | Air                 |
| Connection                      | Compression ring    |
| Model                           | Horizontal/vertical |
| Nominal diameter                | Other               |
| Max. glycol mixture             | 50 %                |

|                            |        |
|----------------------------|--------|
| Suitable for heating       | Yes    |
| Suitable for cooling       | No     |
| Construction length        | 112 mm |
| Article pressure rating    | PN 10  |
| Suitable for open system   | No     |
| Suitable for closed system | Yes    |
| Suitable for solar         | Yes    |
| With dismountable filter   | No     |
| Filter volume              | 0.18 l |
| Magnet operating principle | No     |
| With couplers              | Yes    |
| Material of connection     | Brass  |
| Magnet location            | None   |

### Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

