


Walraven RapidStrut® Cantilever Arm with Rail Prop

(H0815)

cantilever arm with welded support

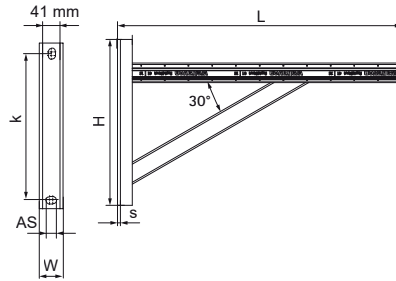

Features & benefits

- U-shaped baseplate with welded channel and welded support beam
- strong cantilever arm for applications with higher loads or extra safety required
- CO₂ welded
- inward formed flanges with serrated profile for extra grip
- horizontal profile type RapidStrut 41|M with continuous perforation
- material: steel 1.0332
- hot dip galvanized

Product Number	VVS Number	Type	Total Height	Total Width	Total Length	Material Thickness	Anchoring Slot	Heart To Heart Distance
<i>Reference letter</i>			<i>H</i>	<i>W</i>	<i>L</i>	<i>MT</i>	<i>AS</i>	<i>k</i>
<i>Unit description</i>			<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>	<i>mm</i>
6601894	018041306	41 M	350	50	600	4.00	20x13	307.5