


Walraven W-LX-M Concrete Screw

(L0358)

zinc-plated concrete screw with M8 external thread connection and torx nut E7

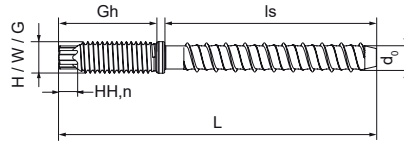

Features & benefits

- very high load capacity
- approved for use in precast prestressed hollow core slabs
- up to 3 anchoring depths provide maximum installation and design flexibility
- reduced edge and anchor spacing distances
- removable
- unique tip and thread geometry prevents concrete spalling
- material: steel
- zinc plated
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- complies with VdS CEA 4001:2014-04 (05) and VdS CEA 4001:2018-01 (06) for applications with sprinkler systems in concrete elements
- substrate type: cracked concrete, non-cracked concrete, precast pre-stressed hollow core slabs
- for loads and more information, refer to the product data sheets and/or the ETA reports

Product Number	VVS Number	Connection Thread	Connection Height	Screw Length	Anchor Size	Key Driver Size	Nominal Head Height	Drill Hole Diameter	Total Height	Total Width	Total Length
Reference Letter		G	Gh	ls		Drive	HH,n	d0	H	W	L
Unit description			mm	mm			mm	mm	mm	mm	mm
62434305	18049635	M8	25.5	55	6	E7	7	6	8	8	83
62434304	18049633	M8	25.5	35	6	E7	7	6	8	8	63