


## START Downlight 90 IP44 DIM

START Downlight 90 IP44 880Lm 840 DIM  
0030380



### Product features

- Ceiling recessed LED downlight IP44 (from the front) with phase dimmable driver, perfect where limited ceiling void is available with only 38mm product depth and 90mm cutout. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 880LM, 4000K, Driver Current: 250mA, CRI80, 80° beam angle, IP44 from the front, IK07, (HxW) 38x109mm, Class 2, 220-240V. Meets TP(a) requirements.

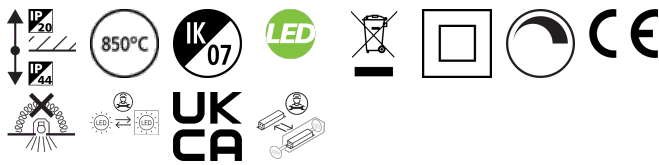


### PRODUCT OVERVIEW

Product name	START Downlight 90 IP44 880Lm 840 DIM
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278449
Warranty	5 years
Useful luminous flux (Fuse)	880
Fixture luminous flux (lm)	880
Luminous flux (lm)	880
Luminaire efficacy (lm/W)	106
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	80
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	8.3
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	Mains: leading / trailing edge
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303802

## START Downlight 90 IP44 DIM *START Downlight 90 IP44 880Lm 840 DIM* 0030380

### PHOTOMETRY

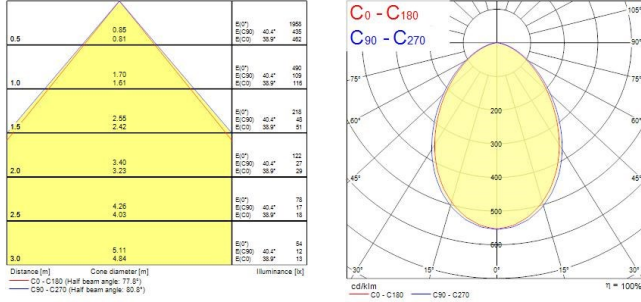

### TECHNICAL DRAWINGS

