

Features

- Logistics and Industry modular high bay luminaire with aisle optics to provide necessary illumination for narrow areas. Twin body with 4 optical modules, 31000 lumens, 205W, 156lm/W, 4000K, CRI 80, aisle beam optic. Fitted with a high bay PIR for 360° detection up to 16m range at 15m mounting height. 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (sensor IK03), (LxWxH) 726x386x133mm, Mains + control cable of 2 meter.


Product Overview

Product name	Sylbay 4000K L4 32000LM AISLE PIR
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	31000
Luminaire efficacy (lm/W)	156
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	30*60
Glare control	< 21
Photobiological Risk Group	RG1
Total power consumption (W)	205
Electrical protection	Class I
Control gear type	Electronic ballast

Sylbay 4000K L4 32000LM AISLE PIR
0040329

Control gear mounting	Integral
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288403298
Warranty	5 years

Photometry

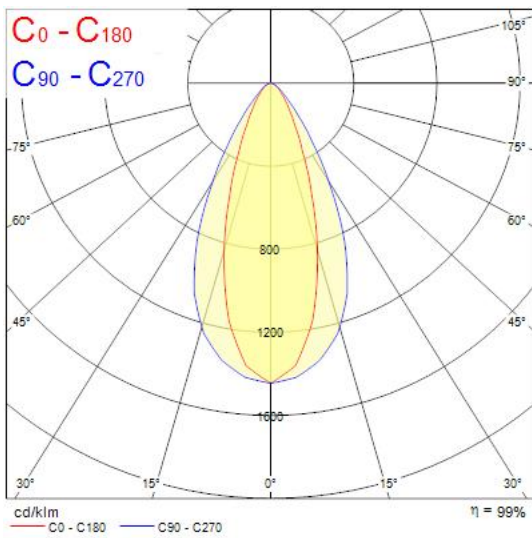

Technical drawings

