

Giotto LED 235
GIOTTO 235 4000K SURFACE 1-10V
3034756



Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1150lm, 10.1W, 114lm/W, 4000K, CRI 80, 1-10V dimmable, 120,000 hours lumen maintenance (L70:B50). Drive current: 275mA, IP44, IK10, Class I, 220-240V.



PRODUCT OVERVIEW

Product name	GIOTTO 235 4000K SURFACE 1-10V
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
E-number FI	4270084
Warranty	5 years
Fixture luminous flux (lm)	1150
Luminous flux (lm)	1150
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	10.1
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	1-10V (Analogue)
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44
IK rating	IK10
Product EAN number	8711971347569

Giotto LED 235

GIOTTO 235 4000K SURFACE 1-10V

3034756

DATA TABLE

General data

Product name	GIOTTO 235 4000K SURFACE 1-10V
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	-25°C...+25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4270084
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1150
Luminous flux (lm)	1150
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	120
Distribution type	Symmetric
Glare control	< 25
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	80

Electrical data

Total power consumption (W)	10.1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	1-10V (Analogue)
Drive current (mA)	300
Inrush Current (A)	5
Inrush Duration (µs)	50

Giotto LED 235

GIOTTO 235 4000K SURFACE 1-10V

3034756

Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	52
Max. products per 16A C Breaker	85
Max. products per 20A C Breaker	104
Max. products per 10A B Breaker	31
Max. products per 16A B Breaker	50
Max. products per 20A B Breaker	62
Connectable conductor cross section - Min (mm²)	0.75
Connectable conductor cross section - Max (mm²)	2.5

Lifetime data

Lifespan L70 B50	170000
Lifespan L80 B10	129000
Lifespan L90 B10	63000

Physical data

Housing colour	White
IP rating	IP44
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Height (mm)	92
Nominal Product Diameter (mm)	235
Weight (kg)	0.86

Packaging

Single packaging type	Carton
Product EAN number	8711971347569
Packaging single length / height (cm)	26.5
Packaging single width (cm)	26.5
Packaging single depth (cm)	9.5
DUN14 (outer)	08711971347569
Units per outer package	1
Packaging outer length / height (cm)	26.5
Packaging outer width (cm)	26.5
Packaging outer depth (cm)	9.5


Safety data

Optimal operating condition (°C)	-25-25
----------------------------------	--------

PHOTOMETRY

Giotto LED 235
GIOTTO 235 4000K SURFACE 1-10V
3034756

0.5	1.61	E(0°) E(C0)	55.1°	1408 104
1.0	3.21	E(0°) E(C0)	55.1°	352 26
1.5	4.82	E(0°) E(C0)	55.1°	156 12
2.0	6.43	E(0°) E(C0)	55.1°	88 7
2.5	8.03	E(0°) E(C0)	55.1°	56 4
3.0	9.64	E(0°) E(C0)	55.1°	39 3
Distance[m]		Cone diameter[m]		Illuminance [lx]
C0 - C180 (Half beam angle: 116.2°)				

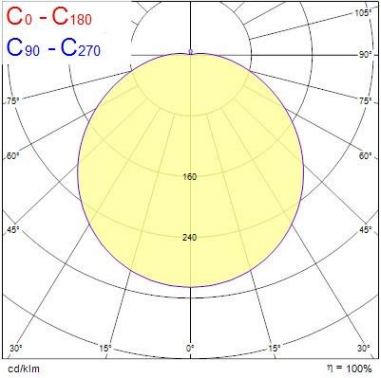

TECHNICAL DRAWINGS

