



Features

• Logistics and Industry high bay luminaire with wide optics to provide homogenous light distribution for open space areas. 32200lumens, 188W, 171lm/W, 4000K, CRI80, wide beam optic. Fitted with a high bay PIR for 360° detection up to 16m range at 15m mounting height.3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK06 (sensor IK03).


Product Overview

Product name	KUBIXX 4000K 32KLM WIDE PIR
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	32200
Luminaire efficacy (lm/W)	171
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 26
Photobiological Risk Group	RG1
Total power consumption (W)	188
Electrical protection	Class I
Control gear type	LED driver constant current
Housing colour	Grey
IP rating	IP65
IK rating	IK06
Product EAN number	5410288621395

KUBIXX 4000K 32KLM WIDE PIR  
0062139

Warranty	5 years
----------	---------

Photometry

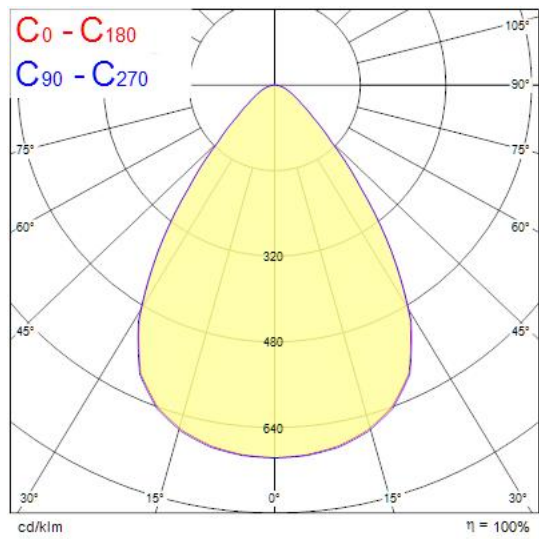

Technical drawings

