


Contact us

ABB Oy
Muottitie 2A 65320
Vaasa, Finland
abb.com/lowvoltage





© Copyright 2025 ABB. All rights reserved.
Specifications subject to change without notice.
34OZXT50 rev. B / 1SCC390195M0201 # 10.4.2025


OT Plus Terminal lugs OZXT50

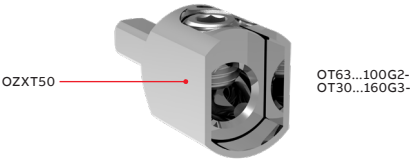

Install

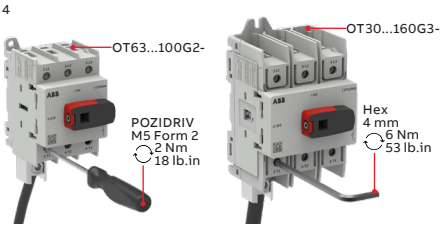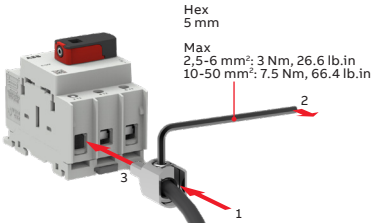

Input S1

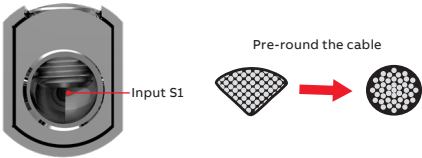

OZXT50

Conductor types IEC 60228	Screw type	Stripping length S1 input	Tightening torque
Class 5-Flexible	SW5 / HEX5 		 2,5-6 mm²: 3 Nm, 26.6 lb.in 10-50 mm²: 7.5 Nm, 66.4 lb.in
Class 2-Stranded			
Class 6-Very flexible with ferrule			
Class 1-Solid			

Cross-section of conductors and numbers of conductors/space

Un 690V	In	2,5 mm ²	6 mm ²	10 mm ²	16 mm ²	25 mm ²	35 mm ²	50 mm ²
Cu	80 A	3	3	3	3	2	1	1
Al	75 A				1	1	1	1



Note!

It is allowed to use max. amount of three adjacent cross-sections in one space. (Copper conductors). The nominal max. cross-section value must not be exceeded. When using aluminum conductors, it is allowed to use only one conductor / space. With the aluminum conductors, it is recommended to use anti-corrosion paste. (e.g. Penetrox).