

Isoline
ISOLINE 1690MM 4K MD UGR 5C
0042522



Product features

- Isoline LED linear luminaire for industrial and commercial applications. 1690 mm length with medium optics provide homogenous light distribution for aisles and focus areas. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <20, 3 SDCM. 57 W power consumption, 8800 lm luminous flux, 154 lm/W efficacy, 1690 mm x 62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.




PRODUCT OVERVIEW

Product name	ISOLINE 1690MM 4K MD UGR 5C
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Useful luminous flux (Fuse)	8800
Fixture luminous flux (lm)	8800
Luminous flux (lm)	8800
Luminaire efficacy (lm/W)	154
Correlated colour temperature (k)	4000
Colour Code	840
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	57
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425221

Isoline
ISOLINE 1690MM 4K MD UGR 5C
0042522

PHOTOMETRY

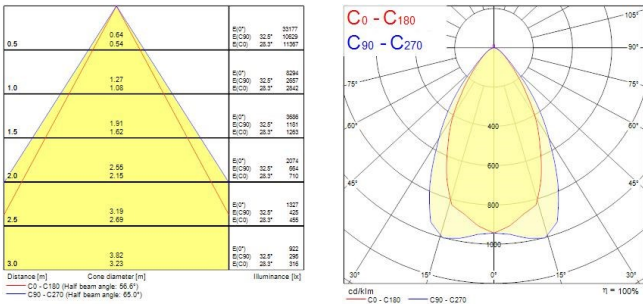

TECHNICAL DRAWINGS

