

Data Sheet | Item Number: 294-4055


Lighting connector; push-button, external; without ground contact; 5-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-4055>



Color: white

Similar to illustration

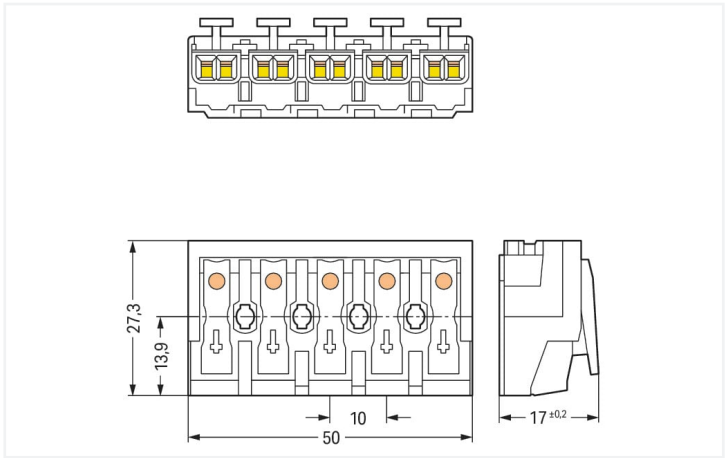

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data									
Ratings per		IEC/EN 60998-1			Ratings per		IEC/EN 60998-2-2		
Overvoltage category		III	III	II	Overvoltage category		III	III	II
Pollution degree		3	2	2	Pollution degree		3	2	2
Nominal voltage		-	-	500 V	Nominal voltage		-	-	500 V
Rated surge voltage		-	-	4 kV	Rated surge voltage		-	-	4 kV
Rated current		-	-	24 A	Rated current		-	-	24 A

Connection data									
Connection points	25	Connection 1							
Total number of potentials	5	Connection type 1	External 1						
Number of connection types	4	Connection technology	Push-in CAGE CLAMP®						
PE function	without PE contact	Number of connection points	2						
		Actuation type	Push-button						
		Connectable conductor materials	Copper						
		Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG						
		Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG						
		Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG						
		Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG						
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG						
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG						
		Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG						
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches						
		Pole number	5						
		Wiring direction	Side-entry wiring						



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		50 mm / 1.969 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data		
Marking		3-N- -1-2
Mounting type		without snap-in mounting feet

Material data		
Note (material data)		Information on material specifications can be found here
Color		white
Material group		IIIa
Insulation material		Polycarbonate (PC)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact plating		Tin
Fire load		0.301 MJ
Halogen-free		Yes
Weight		15.2 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	250 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821097815
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	8cef54f5-d1e4-4d62-9779-ce4c4bda1a1d
SCIP notification number (Belgium)	09986d1b-960c-4b9f-9878-56e0a681fec7
SCIP notification number (Bulgaria)	dc2cda6c-bf1c-4403-9b5f-e2533665f840
SCIP notification number (Czech Republic)	e681cc5f-232d-46f8-b04e-bd0791d3b507
SCIP notification number (Denmark)	ed07e65a-9e6c-4ce6-a312-99086211063d
SCIP notification number (Finland)	91d48d8d-be17-455f-b866-40228b981a23
SCIP notification number (France)	45139cbb-c93d-4314-b970-f6c94dfab7e6
SCIP notification number (Germany)	9a59d1d7-e052-4a16-a09e-8f85c7d2b83f
SCIP notification number (Hungary)	3603553e-0d2d-4530-9ec2-ecb9248e39d0
SCIP notification number (Italy)	bcbc1f5e-5fa1-4aab-9b9e-a4fd991c1e3b
SCIP notification number (Netherlands)	20029748-2ec0-4079-b804-5128a4ce7f8c
SCIP notification number (Poland)	61d51656-4a90-45eb-92a1-177ecd21b209
SCIP notification number (Romania)	265c04b6-8ba4-4899-9e9f-61d56ada436c
SCIP notification number (Sweden)	9affa924-bee5-4ee9-80cc-46bce67bbfa4



Approvals / Certificates

General approvals

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 294-4055

↓

Documentation

Additional Information

Technical Section pdf
2240.62 KB

↓

Bid Text

294-4055	13.06.2017	doc 28.50 KB	↓
294-4055	19.02.2019	xml 5.58 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
294-4055

↓

CAE data

WSCAD Universe
294-4055

↓

ZUKEN Portal
294-4055

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



[Item No.: 294-370](#)
Strain relief; for 294 Series; with snap-in
mounting feet; white

[Item No.: 294-375](#)
Strain relief; for 294 Series; without snap-
in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white



Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool


1.1.2.2 Operating tool




Item No.: 206-294
Disconnection tool; green

Installation Notes


Installation



5-pole – without ground contact




Mounting hole for screw
Notice: The maximum thread diameter for self-tapping screws is 3 mm.




Hole for screw mount
Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Conductor termination




EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

