


Walraven Swivel Beam Clamp Model E

(K2025)

for clamping on beam flange

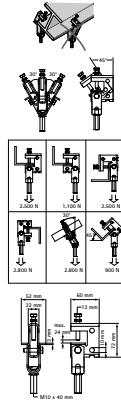

Features & benefits

- multidirectional clamp
- for suspension of light components to pitched beams without welding or drilling
- up to flange thickness 24 mm
- articulation to 30° sideways, 45° forwards
- material: steel
- surface treatment: Dacromet

Product Number	Maximum Clamping Thickness	Maximum Clamping Depth	Total Width x Total Height x Total Depth	Thread Size	Width Across Flats	Maximum Allowed Load Faz
Reference letter			W x H x DtT	TS	WAF	Fa,z
Unit description	(mm)	(mm)	(mm) x (mm) x (mm)		(mm)	(N)
6076000	24	30	60 x 144 x 52	M10	13	2800