

Isoline


ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK

0042556



Product features

- Isoline LED linear luminaire for industrial and commercial applications. 3380mm length with 1.7m blank section, with medium optics provide homogenous light distribution for aisles and focus areas. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <20, 3 SDCM. 57W power consumption, 8800lm luminous flux, 154 lm/W efficacy, 3380 mm x62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.

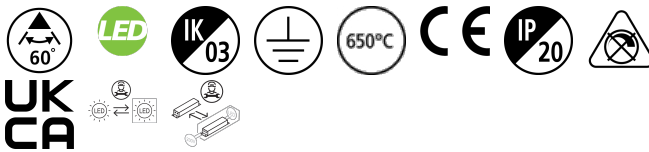


PRODUCT OVERVIEW

Product name	ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry, Retail
ETIM Class	EC000986
Warranty	5 years
Useful luminous flux (Fuse)	8800
Fixture luminous flux (lm)	8800
Luminous flux (lm)	8800
Luminaire efficacy (lm/W)	154
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 20
Photobiological Risk Group	RG1
Total power consumption (W)	57
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425566

Isoline
ISOLINE 3380MM 4K 1.7 MD UGR 1.7BLK
0042556

PHOTOMETRY

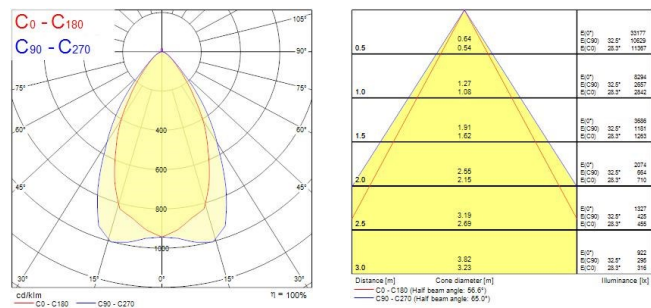

TECHNICAL DRAWINGS

