

Giotto LED 305
GIOTTO 305 3000K SURFACE 1-10V EMERGENCY
3034789



Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1625lm, 18W, 91lm/W, 3000K, CRI 80, 1-10V dimmable, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.




PRODUCT OVERVIEW

Product name	GIOTTO 305 3000K SURFACE 1-10V EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	1625
Fixture luminous flux (lm)	1625
Luminous flux (lm)	1625
Luminaire efficacy (lm/W)	91
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 24
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	128
Luminous flux (emergency) (lm)	128
Total power consumption (W)	18
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	1-10V (Analogue)
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White

Giotto LED 305
GIOTTO 305 3000K SURFACE 1-10V EMERGENCY
3034789

IP rating	IP44
IK rating	IK10
Product EAN number	8711971347897

PHOTOMETRY

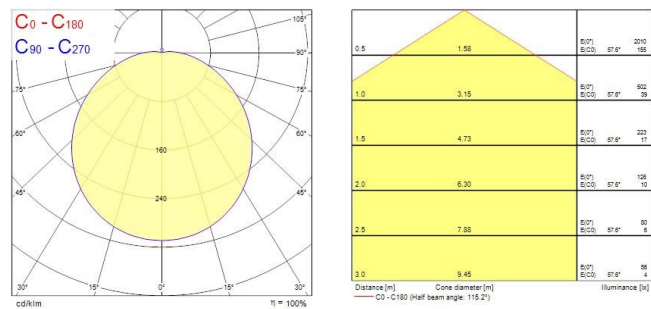

TECHNICAL DRAWINGS

