

Start eco Bollard L-Shape M IP65
START eco Bollard L-Shape M IP65 620lm 830 BLK
0047951



Product features

- Exterior integrated LED bollard, Decorative bollard with a sleek design, Metal - Aluminium housing - RAL9005, 620LM, 8W, 78lm/W, 3000K, Electronic driver, Driver Current: 60mA, CRI80, IP65, IK05, 30,000hrs (L70), (HxWxD) 500x160x90mm, 5 step MacAdam ellipse, 1.53 kg, RAL 9005, Class 1, 220-240V, energy class: A++, A+, A




PRODUCT OVERVIEW

Product name	START eco Bollard L-Shape M IP65 620lm 830 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Residential & Consumer
ETIM Class	EC000301
Warranty	3 years
Useful luminous flux (Fuse)	620
Fixture luminous flux (lm)	620
Luminaire efficacy (lm/W)	78
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	92
Photobiological Risk Group	RG1
Total power consumption (W)	8
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9005 - Jet black
IP rating	IP65
IK rating	IK05
Product EAN number	5410288479514

Start eco Bollard L-Shape M IP65
START eco Bollard L-Shape M IP65 620lm 830 BLK
0047951

PHOTOMETRY

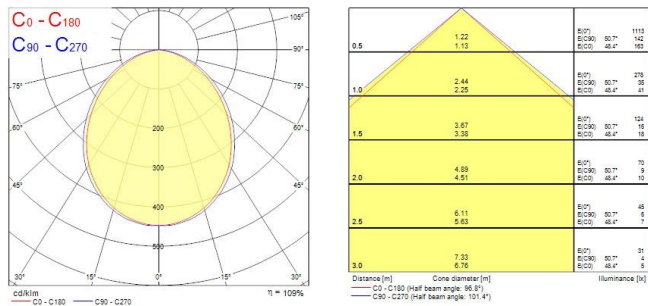

TECHNICAL DRAWINGS

