

START eco Bollard L-Shape M IP65 620lm 830 BLK
0047951



Features

- Exterior integrated LED bollard, Decorative bollard with a sleek design, Metal - Aluminium housing - RAL9005, 620LM, 8W, 78lm/W, 3000K, Electronic driver, Driver Current: 60mA, CRI80, IP65, IK05, 30,000hrs (L70), (HxWxD) 500x160x90mm, 5 step MacAdam ellipse, 1.53 kg, RAL 9005, Class 1, 220-240V, energy class: A++, A+, A


Product Overview

Product name	START eco Bollard L-Shape M IP65 620lm 830 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Residential & Consumer
ETIM Class	EC000301
Fixture luminous flux (lm)	620
Luminaire efficacy (lm/W)	78
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	92
Photobiological Risk Group	RG1
Total power consumption (W)	8
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL9005

**START eco Bollard L-Shape M IP65 620lm 830 BLK
0047951**

IP rating	IP65
IK rating	IK05
Product EAN number	5410288479514
Warranty	3 years
Colour Code	830
Useful luminous flux (#use)	620

Photometry

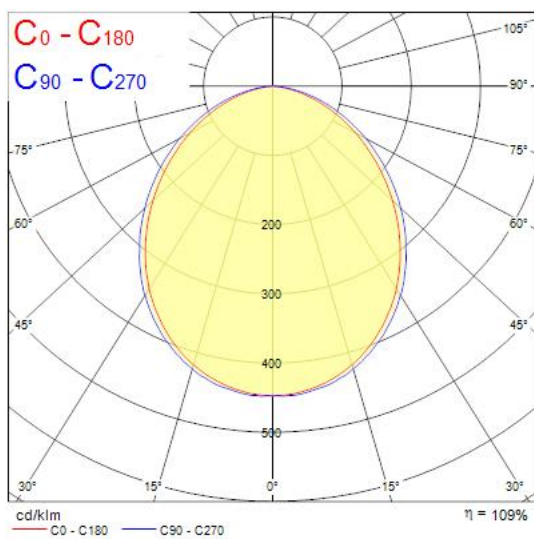

Technical drawings

