




Features

• Logistics and Industry modular high bay luminaire with wide optics to provide homogenous light distribution for open space areas. Twin body with 6 optical modules, 47400 lumens, 327W, 145lm/W, 4000K, CRI 80, wide beam optic. Fitted with a high bay PIR for 360° detection up to 16m range at 15m mounting height. 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (sensor IK03), (LxWxH) 726x386x133mm, Mains + control cable of 2 meter.

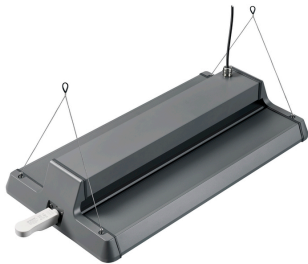


Product Overview

Product name	Sylbay 4000K L6 47000LM WIDE PIR
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	47400
Luminaire efficacy (lm/W)	145
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Glare control	< 23
Photobiological Risk Group	RG1
Total power consumption (W)	327
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Housing colour	Grey

Sylbay 4000K L6 47000LM WIDE PIR  
**0040332**

<b>IP rating</b>	IP65
<b>IK rating</b>	IK08
<b>Product EAN number</b>	5410288403328
<b>Warranty</b>	5 years

## Photometry

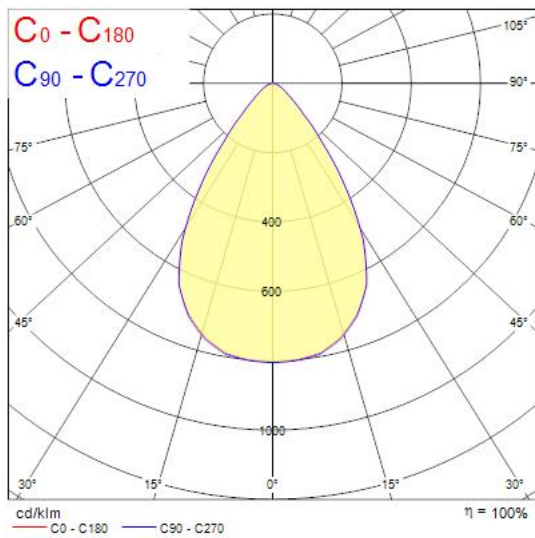

## Technical drawings

