



Features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1150lm, 10.1W, 114lm/W, 4000K, CRI 80, DALI, 120,000 hours lumen maintenance (L70:B50). Drive current: 275mA, IP44, IK10, Class I, 220-240V.

Product Overview

Product name	GIOTTO 235 4000K SURFACE DALI
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor
E-number FI	4270117
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	114
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	10.1
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White

Lumiance

GIOTTO 235 4000K SURFACE DALI

3034760

IP rating

IP44

IK rating

IK10

Product EAN number

8711971347606


Warranty

5 years

Colour Code

840

Photometry

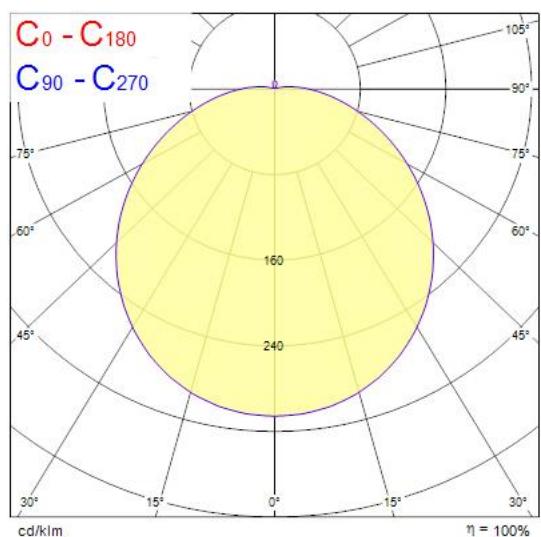

Technical drawings

Giotto 235 surface mounted

