

Features

• Isoline LED linear luminaire for industrial and commercial applications. 3380mm length with 1.7m blank section, with wide optics provide homogeneous light distribution for open areas. Aluminium housing, RAL 9016. Max + 35 °C operating temperature range, 4000 K, CRI 80, UGR <25, 3 SDCM. 57W power consumption, 8150lm luminous flux, 143 lm/W efficacy, 3380 mm x62 mm x 59 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 60,000 hours.


Product Overview

Product name	ISOLINE 3380MM 4K 1.7WD 1.7BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry, Retail
ETIM Class	EC000986
Fixture luminous flux (lm)	8150
Luminous flux (lm)	8150
Luminaire efficacy (lm/W)	143
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 25
Photobiological Risk Group	RG1
Total power consumption (W)	57
Electrical protection	Class I
Control gear type	LED driver constant current

ISOLINE 3380MM 4K 1.7WD 1.7BLK
0042554

LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9016
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425542
Warranty	5 years
Dimming method	N/A
Colour Code	840
Useful luminous flux (#use)	8150

Photometry

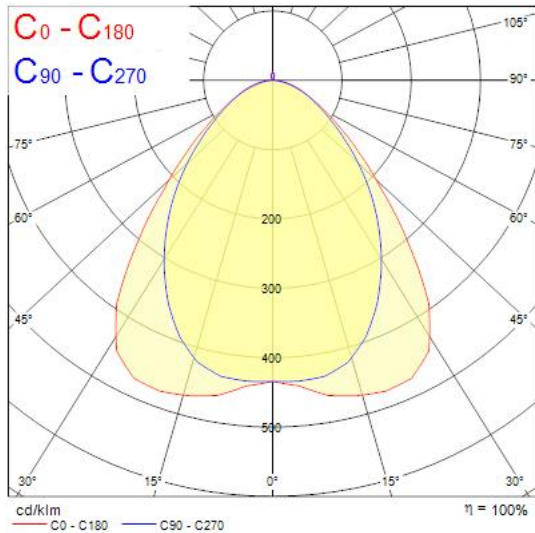

Technical drawings

