


Rail & Trunk System - DALI inserts
RTS 1500MM 70W WD DALI WHITE
0042594



Product features

- RTS LED linear luminaire for industrial and commercial applications. 1500 mm length with wide optics provide homogeneous light distribution for open areas. Suitable for DALI Dimming. Steel housing, White color, -25 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDCM. 70 W power consumption, 11200 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.

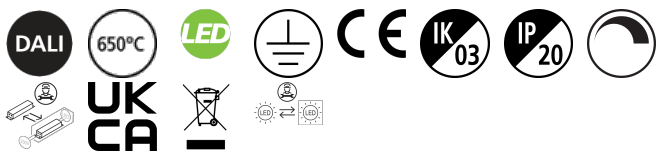


PRODUCT OVERVIEW

Product name	RTS 1500MM 70W WD DALI WHITE
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Useful luminous flux (Fuse)	11200
Fixture luminous flux (lm)	11200
Luminaire efficacy (lm/W)	160
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Photobiological Risk Group	RG1
Total power consumption (W)	70
Electrical protection	Class I
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425948

PHOTOMETRY

Rail & Trunk System - DALI inserts
RTS 1500MM 70W WD DALI WHITE
0042594

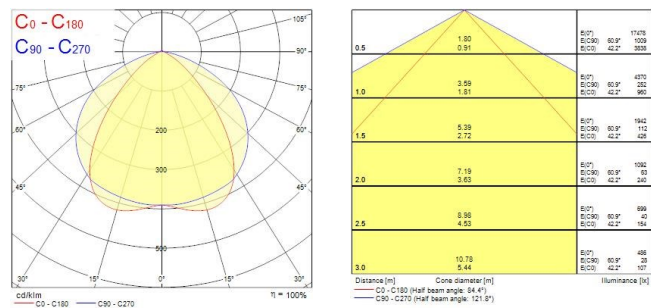

TECHNICAL DRAWINGS

