


# SylWork Flood BP 5000LM 840 IP65

Item No: 0090001




YourHome

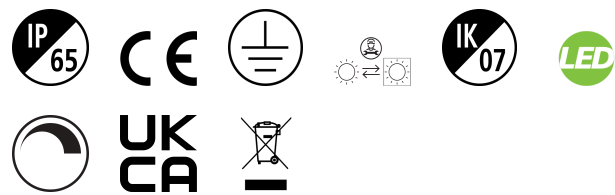

- Slim LED portable work light • Lightweight, slim, stylish robust, • High-quality plastic body • Stable, flexible positioning with stand or Tripod • Option to use 2 work lights in the same time installed on the same Tripod • Battery Operation - Battery running time & Lumen output: 90 minutes @ 1200lm, 5 hours @300lm, battery charging time: 4 hours • Space-saving design – Tripod version can be folded up and stowed away • 4000K Cool White light • Total system efficacy up to 111lm/W • CRI >80 • Operating temperature range: -20 to +40°C • Lifetime: 30.000 hrs (L70/B50) • 3 year warranty

## Technical Assets

### Dimensions (mm)

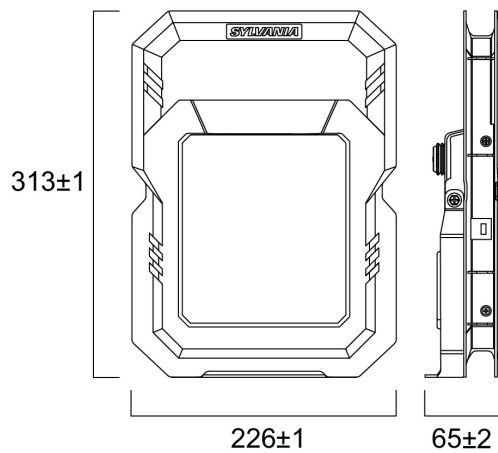

### Photometrics

# SylWork Flood BP 5000LM 840 IP65

Item No: 0090001



## General data

|                     |                                  |
|---------------------|----------------------------------|
| Product name        | SylWork Flood BP 5000LM 840 IP65 |
| Technology          | LED                              |
| Cap/Base            | N/A                              |
| Housing             | Metal/plastic                    |
| General application | Residential & Consumer           |
| ETIM Class          | EC000346                         |
| E-number FI         | 4357143                          |
| Warranty            | 3 years                          |

## Optical data

|                                   |            |
|-----------------------------------|------------|
| Fixture luminous flux (lm)        | 5000       |
| Correlated colour temperature (k) | 4000       |
| Light colour                      | Cool White |
| CRI (Ra)                          | 80         |
| Photobiological Risk Group        | RG1        |

## Electrical data

|                                                 |             |
|-------------------------------------------------|-------------|
| Total power consumption (W)                     | 45          |
| Primary Supply/Product voltage - min (V)        | 220.0       |
| Primary Supply/Product voltage - max (V)        | 240.0       |
| Electrical protection                           | Class I     |
| Dimmable                                        | Yes         |
| Dimming method                                  | Onboard pot |
| Nominal Frequency (Hz)                          | 50Hz        |
| Connectable conductor cross section - Max (mm²) | 1.0         |

## Lifetime data

|                  |       |
|------------------|-------|
| Lifespan L70 B50 | 30000 |
| Lifespan L90 B10 | 9000  |

## Physical data

|                             |      |
|-----------------------------|------|
| IP rating                   | IP65 |
| IK rating                   | IK07 |
| Nominal Product Length (mm) | 313  |
| Nominal Product Width (mm)  | 226  |
| Nominal Product Height (mm) | 65   |
| Weight (kg)                 | 1.73 |

## Packaging

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288900018  |
| Packaging single length / height (cm) | 24.5           |
| Packaging single width (cm)           | 33.0           |
| Packaging single depth (cm)           | 7.5            |
| DUN14 (inner)                         | 15410288900015 |
| Units per outer package               | 5              |
| Packaging outer length / height (cm)  | 39.5           |
| Packaging outer width (cm)            | 26.0           |
| Packaging outer depth (cm)            | 35.0           |