

SylBay - SylSmart
Sylbay 4000K L2 9000LM WIDE SSE
0040338



Product features

- Logistics and Industry modular high bay luminaire with wide optics to provide homogenous light distribution for open space areas. Single body with 2 optical modules, 9100 lumens, 57W, 160lm/W, 4000K, CRI 80, wide beam optic, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (Sensor IK03), (LxWxH) 505x386x133mm, Mains + control cable of 2 meter, SylSmart Connected Industry enabled.




PRODUCT OVERVIEW

| | |
|---------------------------------|---------------------------------|
| Product name | Sylbay 4000K L2 9000LM WIDE SSE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Suspended |
| Fixture rating | Enclosed |
| General application | Logistics & Industry |
| ETIM Class | EC001716 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 9100 |
| Luminaire efficacy (lm/W) | 160 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 75 |
| Glare control | < 20 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 57 |
| Electrical protection | Class I |
| Control gear type | LED driver constant current |
| Control gear mounting | Integral |
| Dimmable | Yes |
| Dimming method | SylSmart SSE |
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Product EAN number | 5410288403380 |

SylBay - SylSmart
Sylbay 4000K L2 9000LM WIDE SSE
0040338

PHOTOMETRY

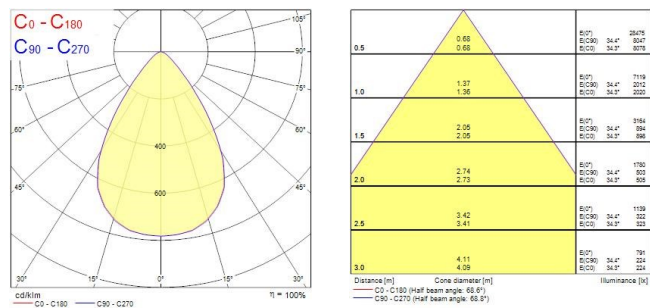

TECHNICAL DRAWINGS

