



Features

- Slim LED portable work light
- Lightweight, slim, stylish robust,
- High-quality plastic body
- Stable, flexible positioning with stand or Tripod
- Option to use 2 work lights in the same time installed on the same Tripod
- Battery Operation - Battery running time & Lumen output: 90 minutes @ 1200lm, 5 hours @300lm, battery charging time: 4 hours
- Space-saving design – Tripod version can be folded up and stowed away
- 4000K Cool White light
- Total system efficacy up to 111lm/W
- CRI >80
- Operating temperature range: -20 to +40°C
- Lifetime: 30.000 hrs (L70/B50)
- 3 year warranty


Product Overview

Product name	SylWork Flood BP 5000LM 840 IP65
Technology	LED
Cap/Base	N/A
Housing	Metal/plastic
General application	Residential & Consumer
ETIM Class	EC000346
E-number FI	4357143
Fixture luminous flux (lm)	5000
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Photobiological Risk Group	RG1
Total power consumption (W)	45
Electrical protection	Class I
Dimmable	Yes
IP rating	IP65
IK rating	IK07
Product EAN number	5410288900018
Warranty	3 years

SylWork Flood BP 5000LM 840 IP65
0090001

Dimming method	Onboard pot
----------------	-------------

Technical drawings

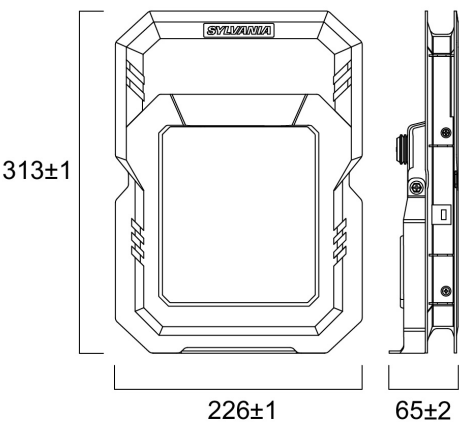

Data table

GENERAL DATA

Product name	SylWork Flood BP 5000LM 840 IP65
Technology	LED
Cap/Base	N/A
Housing	Metal/plastic
General application	Residential & Consumer
ETIM Class	EC000346
E-number FI	4357143
Warranty	3 years

OPTICAL DATA

Fixture luminous flux (lm)	5000
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Photobiological Risk Group	RG1

SylWork Flood BP 5000LM 840 IP65 0090001

ELECTRICAL DATA

Total power consumption (W)	45
Primary Supply/Product voltage - min (V)	220.0
Primary Supply/Product voltage - max (V)	240.0
Electrical protection	Class I
Control gear required	No
Dimmable	Yes
Dimming method	Onboard pot
Nominal Frequency (Hz)	50Hz
Connectable conductor cross section - Max (mm ²)	1.0

LIFETIME DATA

Lifespan L70 B50	30000
Lifespan L90 B10	9000

PHYSICAL DATA

IP rating	IP65
IK rating	IK07
Nominal Product Length (mm)	313
Nominal Product Width (mm)	226
Nominal Product Height (mm)	65
Weight (kg)	1.73

PACKAGING

Product EAN number	5410288900018
Packaging single length / height (cm)	24.5
Packaging single width (cm)	33.0
Packaging single depth (cm)	7.5
DUN14 (inner)	15410288900015
Units per outer package	5
Packaging outer length / height (cm)	39.5



SylWork Flood BP 5000LM 840 IP65
0090001

Packaging outer width (cm)	26.0
Packaging outer depth (cm)	35.0

SAFETY DATA

Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No