



Data Sheet | Item Number: 294-4323

Lighting connector; push-button, external; with angled snap-in ground contact; 3-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-4323>

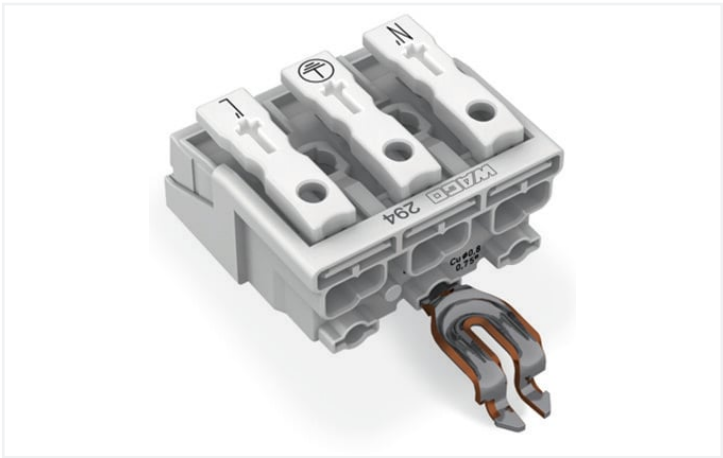

Color: white

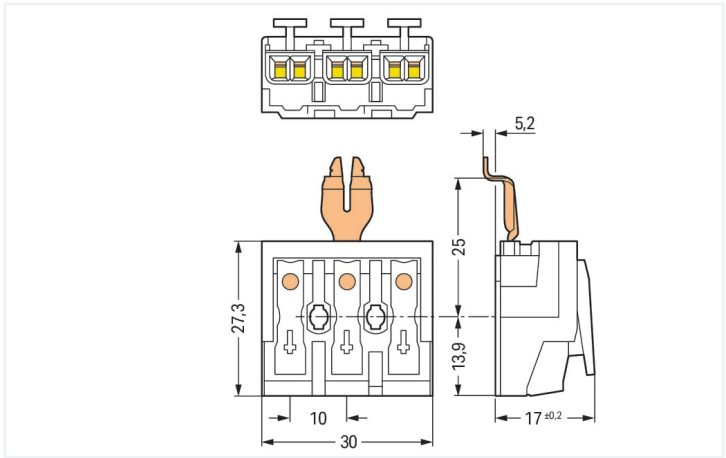

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data									
Ratings per		IEC/EN 60998-1			Ratings per		IEC/EN 60998-2-2		
Overvoltage category		III	III	II	Overvoltage category		III	III	II
Pollution degree		3	2	2	Pollution degree		3	2	2
Nominal voltage		-	-	500 V	Nominal voltage		-	-	500 V
Rated surge voltage		-	-	4 kV	Rated surge voltage		-	-	4 kV
Rated current		-	-	24 A	Rated current		-	-	24 A

Connection data																																
Connection points	15	Connection 1 <table><tr><td>Connection type 1</td><td>External 1</td></tr><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Number of connection points</td><td>2</td></tr><tr><td>Actuation type</td><td>Push-button</td></tr><tr><td>Connectable conductor materials</td><td>Copper</td></tr><tr><td>Solid conductor</td><td>0.5 ... 2.5 mm² / 18 ... 12 AWG</td></tr><tr><td>Solid conductor; push-in termination</td><td>0.5 ... 2.5 mm² / 18 ... 12 AWG</td></tr><tr><td>Stranded conductor</td><td>0.5 ... 2.5 mm² / 18 ... 14 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.5 ... 2.5 mm² / 18 ... 14 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.5 ... 1.5 mm² / 18 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.5 ... 1.5 mm² / 18 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with ferrule; push-in termination</td><td>0.5 mm² / 18 AWG</td></tr><tr><td>Strip length</td><td>8 ... 9 mm / 0.31 ... 0.35 inches</td></tr><tr><td>Pole number</td><td>3</td></tr><tr><td>Wiring direction</td><td>Side-entry wiring</td></tr></table>	Connection type 1	External 1	Connection technology	Push-in CAGE CLAMP®	Number of connection points	2	Actuation type	Push-button	Connectable conductor materials	Copper	Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG	Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG	Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG	Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG	Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG	Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG	Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG	Strip length	8 ... 9 mm / 0.31 ... 0.35 inches	Pole number	3	Wiring direction	Side-entry wiring
Connection type 1	External 1																															
Connection technology	Push-in CAGE CLAMP®																															
Number of connection points	2																															
Actuation type	Push-button																															
Connectable conductor materials	Copper																															
Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG																															
Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG																															
Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG																															
Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG																															
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG																															
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG																															
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG																															
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches																															
Pole number	3																															
Wiring direction	Side-entry wiring																															
Total number of potentials	3																															
Number of connection types	4																															
PE function	Angled snap-in PE contact																															



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3	
Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm² / 18 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		30 mm / 1.181 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data		
Marking		N´ - -L´
Mounting type		without snap-in mounting feet

Material data		
Note (material data)		Information on material specifications can be found here
Color		white
Material group		IIIa
Insulation material		Polycarbonate (PC)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact plating		Tin
Fire load		0.182 MJ
Halogen-free		Yes
Weight		10.1 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821097976
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	226de4b6-9376-4619-b26f-8e29b0195804
SCIP notification number (Belgium)	b8af0dcb-32d8-4811-a3d0-183842c1572c
SCIP notification number (Bulgaria)	fef5d727-23a8-48a4-ba48-2df9f9766f96
SCIP notification number (Czech Republic)	fc322cee-8606-42bb-9ae5-b4ccc08eef79
SCIP notification number (Denmark)	55e4e882-31a5-4935-83b9-093143bc7cb3
SCIP notification number (Finland)	2ed6af20-d6d3-453f-af61-fd71c43878ea
SCIP notification number (France)	7527e693-fa62-4cdd-bd82-72165947f327
SCIP notification number (Germany)	e3c1a65b-b343-4006-a4ca-c0df7e4ff388
SCIP notification number (Hungary)	d2cba47c-cfd5-4971-8980-9c830beb2db4
SCIP notification number (Italy)	eab868f1-4beb-481d-9107-297bc04dfe45
SCIP notification number (Netherlands)	4dd282b2-1d8a-40ca-a8d7-457fa2ed1dec
SCIP notification number (Poland)	9d6db13c-ac56-4196-b4ed-095d8c21ccd8
SCIP notification number (Romania)	3ab5f322-66c3-4917-add9-14a90655cf81
SCIP notification number (Sweden)	be989d53-df4e-45d2-9527-f928222fabe0



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 294-4323



Documentation

Additional Information
Technical Section

pdf
2240.62 KB



Bid Text
294-4323
19.02.2019
xml 5.60 KB
294-4323
13.06.2017
doc 28.00 KB



CAD/CAE-Data

CAD data
2D/3D Models 294-4323



CAE data
WSCAD Universe 294-4323
ZUKEN Portal 294-4323



1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



[Item No.: 294-370](#)
Strain relief; for 294 Series; with snap-in
mounting feet; white

[Item No.: 294-375](#)
Strain relief; for 294 Series; without snap-
in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364

Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white



Item No.: 294-384

Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool

1.1.2.2 Operating tool




Item No.: 206-294


Disconnection tool; green

Installation Notes


Installation



3-pole – with snap-in ground contact, d = 4.9 mm




Mounting hole for screw
Notice: The maximum thread diameter for self-tapping screws is 3 mm.




Hole for screw mount
Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Conductor termination



EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

