

Features

- Logistics and Industry modular high bay luminaire with aisle optics to provide necessary illumination for narrow areas. Single body with 2 optical modules, 9100 lumens, 57W, 160lm/W, 4000K, CRI 80, aisle beam optic, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK08 (Sensor IK03), (LxWxH) 505x386x133mm, Mains + control cable of 2 meter, SylSmart Connected Industry enabled.


Product Overview

Product name	Sylbay 4000K L2 9000LM AISLE SSE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Suspended
Fixture rating	Enclosed
Fixture luminous flux (lm)	9100
Luminaire efficacy (lm/W)	160
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Colour Variation Initial (SDCM)	3
Beam Angle (°)	30*60
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	57
Electrical protection	Class I

Sylbay 4000K L2 9000LM AISLE SSE
0040339

Control gear type	LED driver constant current
Control gear mounting	Integral
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288403397
Warranty	5 years

Photometry

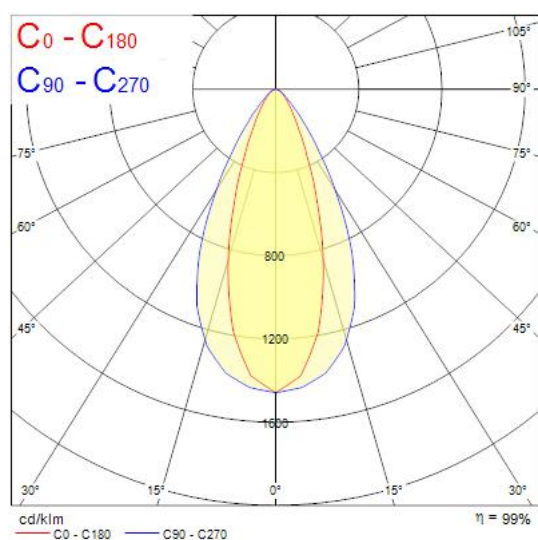

Technical drawings

