





Color: ■ gray

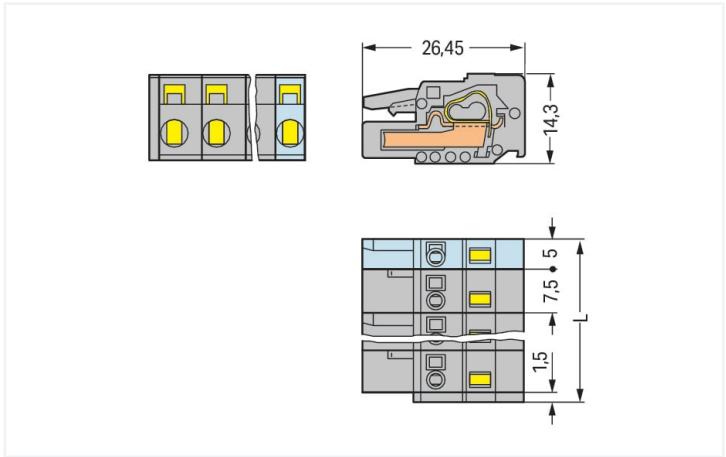

Dimensions in mm
L = (pole no. – 1) x pin spacing + 5 mm + 1.5 mm
2- to 3-pole female connectors – one latch only

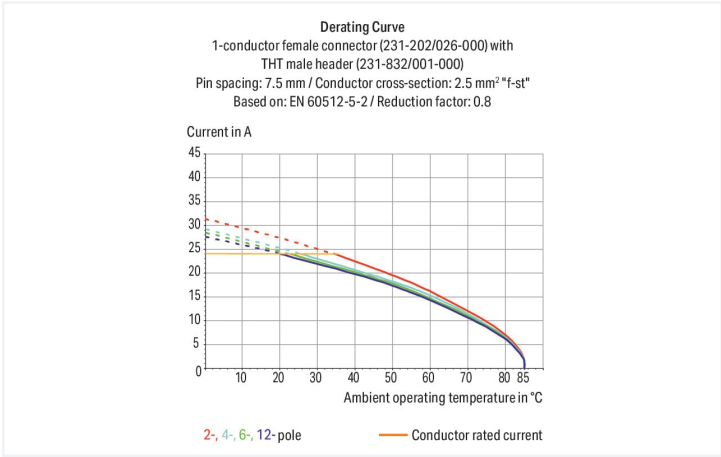

- Universal connection for all conductor types
- Easy cable pre-assembly and on-unit wiring via vertical and horizontal CAGE CLAMP® actuation
- Integrated test ports
- With coding fingers

Notes	
Safety information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data						
Ratings per		IEC/EN 60664-1			Approvals per	
		UL 1059				
Overvoltage category		III	III	II	Use group	B C D
Pollution degree		3	2	2	Rated voltage	300 V - 300 V
Nominal voltage		500 V	630 V	1000 V	Rated current	15 A - 10 A
Rated surge voltage		6 kV	6 kV	6 kV		
Rated current		16 A	16 A	16 A		

Approvals per		UL 1977			Approvals per	
		CSA				
Rated voltage		600 V			Use group	B C D
Rated current		15 A			Rated voltage	300 V - 300 V
					Rated current	15 A - 10 A

Connection data						
Connection points	8	Connection 1				
Total number of potentials	8	Connection technology	CAGE CLAMP®			
Number of connection types	1	Actuation type	Operating tool			
Number of levels	1	Actuation direction 1	Operation parallel to conductor entry			
		Actuation direction 2	Operation perpendicular to conductor entry			
		Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG			
		Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG			
		Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm²			
		Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm²			
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches			
		Pole number	8			
		Conductor entry direction to mating direction	0°			

Physical data		
Pin spacing	7.5 mm / 0.295 inches	
Width	59 mm / 2.323 inches	
Height	14.3 mm / 0.563 inches	
Depth	26.45 mm / 1.041 inches	

Mechanical data	
Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection	
Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismatching protection	No



Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper alloy
Contact plating	Tin
Fire load	0.631 MJ
Weight	16.6 g

Environmental requirements	
Limit temperature range	-60 ... +85 °C
Processing temperature	-35 ... +60 °C

Commercial data	
Product Group	3 (Multi Conn. System)
eCl@ss 10.0	27-44-03-09
eCl@ss 9.0	27-44-03-09
ETIM 8.0	EC002638
ETIM 7.0	EC002638
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918344340
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
   					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-39756/A1	Railway WAGO GmbH & Co. KG	-	Railway Ready
CSA DEKRA Certification B.V.	C22.2	1466354			
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-121453			
UR Underwriters Laboratories Inc.	UL 1977	E 45171			
UR Underwriters Laboratories Inc.	UL 1059	E45172			



Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	19-HG1869876-PDA
BV Bureau Veritas S.A.	IEC 60998	11915/D0 BV
DNV DNV GL SE	-	TAE000016Z

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 231-208/026-000



Documentation

Additional Information
Technical Section
03.04.2019
pdf 2010.85 KB



CAD/CAE-Data

CAD data
2D/3D Models 231-208/026-000



CAE data
EPLAN Data Portal 231-208/026-000
ZUKEN Portal 231-208/026-000



1 Compatible Products

1.1 System counterpart

1.1.1 Male connector/plug



Item No.: [731-608](#)
1-conductor male connector; CAGE
CLAMP®; 2.5 mm²; Pin spacing 7.5 mm; 8-
pole; 2,50 mm²; gray



Item No.: [731-608/019-000](#)
1-conductor male connector; CAGE
CLAMP®; 2.5 mm²; Pin spacing 7.5 mm; 8-
pole; clamping collar; 2,50 mm²; gray



Item No.: [731-608/018-000](#)
1-conductor male connector; CAGE
CLAMP®; 2.5 mm²; Pin spacing 7.5 mm; 8-
pole; DIN-35 rail/panel mounting; Snap-in
mounting feet; 2,50 mm²; gray



Item No.: [731-608/114-000](#)
1-conductor male connector; CAGE
CLAMP®; 2.5 mm²; Pin spacing 7.5 mm; 8-
pole; Snap-in flange; 2,50 mm²; gray



Item No.: [232-568/007-000](#)
Double pin header; DIN-35 rail mounting;
8-pole; Pin spacing 7.5 mm; gray



Item No.: [231-838/001-000/105-604/997-409](#)
THR male header; 1.0 x 1.0 mm solder pin;
angled; in tape-and-reel packaging; Pin
spacing 7.5 mm; 8-pole; black



Item No.: [231-838/001-000/105-604](#)
THR male header; 1.0 x 1.0 mm solder pin;
angled; Pin spacing 7.5 mm; 8-pole; black



Item No.: [231-238/001-000/105-604/997-409](#)
THR male header; 1.0 x 1.0 mm solder pin;
straight; in tape-and-reel packaging; Pin
spacing 7.5 mm; 8-pole; black



1.1.1 Male connector/plug

			
<u>Item No.: 231-238/001-000/105-604</u> THR male header; 1.0 x 1.0 mm solder pin; straight; Pin spacing 7.5 mm; 8-pole; black	<u>Item No.: 231-868/001-000/105-604/997-409</u> THR male header; 1.2 x 1.2 mm solder pin; angled; in tape-and-reel packaging; Pin spacing 7.5 mm; 8-pole; black	<u>Item No.: 231-868/001-000/105-604</u> THR male header; 1.2 x 1.2 mm solder pin; angled; Pin spacing 7.5 mm; 8-pole; black	<u>Item No.: 231-268/001-000/105-604/997-409</u> THR male header; 1.2 x 1.2 mm solder pin; straight; in tape-and-reel packaging; Pin spacing 7.5 mm; 8-pole; black
			
<u>Item No.: 231-268/001-000/105-604</u> THR male header; 1.2 x 1.2 mm solder pin; straight; Pin spacing 7.5 mm; 8-pole; black	<u>Item No.: 231-838/001-000</u> THT male header; 1.0 x 1.0 mm solder pin; angled; Pin spacing 7.5 mm; 8-pole; gray	<u>Item No.: 231-238/001-000</u> THT male header; 1.0 x 1.0 mm solder pin; straight; Pin spacing 7.5 mm; 8-pole; gray	<u>Item No.: 231-868/001-000</u> THT male header; 1.2 x 1.2 mm solder pin; angled; Pin spacing 7.5 mm; 8-pole; gray
			
<u>Item No.: 231-268/001-000</u> THT male header; 1.2 x 1.2 mm solder pin; straight; Pin spacing 7.5 mm; 8-pole; gray			

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover


<u>Item No.: 231-668</u> Lockout caps; for covering unused clamping units; gray

1.2.2 Ferrule

1.2.2.1 Ferrule

			
<u>Item No.: 216-301</u> Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	<u>Item No.: 216-321</u> Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	<u>Item No.: 216-151</u> Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated	<u>Item No.: 216-131</u> Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated; silver-colored
			
<u>Item No.: 216-302</u> Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	<u>Item No.: 216-322</u> Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	<u>Item No.: 216-132</u> Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated	<u>Item No.: 216-152</u> Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated
			
<u>Item No.: 216-241</u> Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white	<u>Item No.: 216-201</u> Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white	<u>Item No.: 216-221</u> Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; white	<u>Item No.: 216-141</u> Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92
			
<u>Item No.: 216-101</u> Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored	<u>Item No.: 216-121</u> Ferrule; Sleeve for 0.5 mm² / AWG 22; uninsulated; electro-tin plated; silver-colored	<u>Item No.: 216-242</u> Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray	<u>Item No.: 216-262</u> Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray
			
<u>Item No.: 216-202</u> Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray	<u>Item No.: 216-222</u> Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; gray	<u>Item No.: 216-142</u> Ferrule; Sleeve for 0.75 mm² / 18 AWG; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	<u>Item No.: 216-102</u> Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored



1.2.2.1 Ferrule

 Item No.: 216-122 Ferrule; Sleeve for 0.75 mm² / AWG 20; uninsulated; electro-tin plated; silver-colored	 Item No.: 216-243 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	 Item No.: 216-263 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red	 Item No.: 216-203 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red
 Item No.: 216-223 Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; red	 Item No.: 216-103 Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated	 Item No.: 216-143 Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92	 Item No.: 216-123 Ferrule; Sleeve for 1 mm² / AWG 18; uninsulated; electro-tin plated; silver-colored
 Item No.: 216-204 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black	 Item No.: 216-224 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; black	 Item No.: 216-244 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	 Item No.: 216-264 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black
 Item No.: 216-284 Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black	 Item No.: 216-124 Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated	 Item No.: 216-144 Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 1/08.92; silver-colored	 Item No.: 216-104 Ferrule; Sleeve for 1.5 mm² / AWG 16; uninsulated; electro-tin plated; silver-colored
 Item No.: 216-106 Ferrule; Sleeve for 2.5 mm² / AWG 14; uninsulated; electro-tin plated; silver-colored			

1.2.3 Insulation stop

1.2.3.1 Insulation stop

 Item No.: 231-673 Insulation stop; 0.08-0.2 mm² / 0.2 mm² "S"; white	 Item No.: 231-674 Insulation stop; 0.25 - 0.5 mm²; light gray	 Item No.: 231-675 Insulation stop; 0.75 - 1 mm²; dark gray
---	--	--

1.2.4 Marking

1.2.4.1 Marking strip

 Item No.: 210-331/750-202 Marking strips; as a DIN A4 sheet; MARKED; 1-16 (100x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white	 Item No.: 210-332/750-020 Marking strips; as a DIN A4 sheet; MARKED; 1-20 (80x); Height of marker strip: 3 mm; Strip length 182 mm; Horizontal marking; Self-adhesive; white
---	---

1.2.5 Test and measurement

1.2.5.1 Testing accessories



Item No.: 210-136
Test plug; 2 mm Ø; with 500 mm cable; red



Item No.: 231-662
Test plugs for female connectors; for 7.5 mm and 7.62 mm pin spacing; 2,50 mm²; light gray

1.2.6 Tool

1.2.6.1 Operating tool



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured



Item No.: 210-657
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; short; multicoloured




Item No.: 231-291
Operating tool; made of insulating material; 1-way; loose; red




Item No.: 231-131
Operating tool; made of insulating material; 1-way; loose; white

Installation Notes

Conductor termination



Inserting a conductor via 3.5 mm screwdriver – CAGE CLAMP® actuation parallel to conductor entry.



Inserting a conductor via 3.5 mm screwdriver – CAGE CLAMP® actuation perpendicular to conductor entry.



Inserting a conductor into CAGE CLAMP® unit via operating tool (231-291).




Inserting a conductor via operating tool.

Coding




Coding a female connector by removing coding finger(s).

Testing



Testing – female connector with CAGE CLAMP®
Integrated test ports for testing perpendicular to conductor entry via 2 or 2.3 mm Ø test plug

Installation




Male connector with strain relief plate



Strain relief housing shown with a male connector equipped with CAGE CLAMP®

Marking



Labeling via direct marking or self-adhesive strips.