



Data Sheet | Item Number: 294-4375

Lighting connector; push-button, external; with angled snap-in ground contact; 5-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-4375>

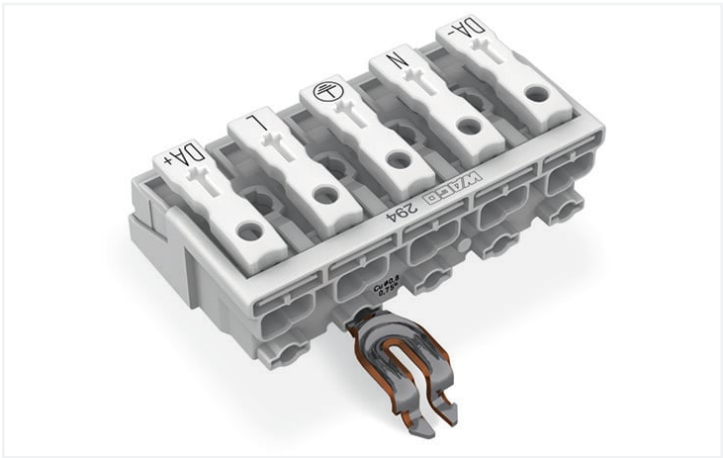

Color: white

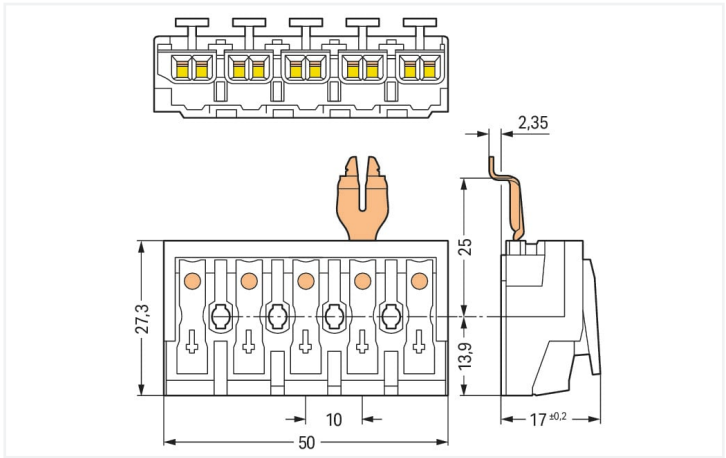

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data						
Ratings per		IEC/EN 60998-1			Ratings per	
		IEC/EN 60998-2-2				
Overvoltage category	III	III	II	Overvoltage category	III	III
Pollution degree	3	2	2	Pollution degree	3	2
Nominal voltage	-	-	500 V	Nominal voltage	-	-
Rated surge voltage	-	-	4 kV	Rated surge voltage	-	-
Rated current	-	-	24 A	Rated current	-	-

Connection data		Connection 1	
Connection points	25	Connection type 1	External 1
Total number of potentials	5	Connection technology	Push-in CAGE CLAMP®
Number of connection types	4	Number of connection points	2
PE function	Angled snap-in PE contact	Actuation type	Push-button
		Connectable conductor materials	Copper
		Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
		Pole number	5
		Wiring direction	Side-entry wiring



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		50 mm / 1.969 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data		
Marking		DA- N L DA+
Mounting type		without snap-in mounting feet

Material data		
Note (material data)		Information on material specifications can be found here
Color		white
Material group		IIIa
Insulation material		Polycarbonate (PC)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact plating		Tin
Fire load		0.301 MJ
Halogen-free		Yes
Weight		16.1 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821098034
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	ca7f2bfe-eb10-4027-9429-cb203407d3f7
SCIP notification number (Belgium)	6ef89e0d-96ef-4bb5-83b5-aa5f6d6ee47a
SCIP notification number (Bulgaria)	87c4149e-3a5b-4bca-98e9-8d1a4df63772
SCIP notification number (Czech Republic)	894e435c-c41f-4549-95fa-aec9d1c74944
SCIP notification number (Denmark)	6d6ce5f4-6113-4307-80de-944f935eec4f
SCIP notification number (Finland)	1a3047e5-27b8-40c1-884c-75c50b8a083f
SCIP notification number (France)	7d84cfdc-d6cb-4abc-a9e5-a4b04ec09585
SCIP notification number (Germany)	d6d301d0-3f6c-4a94-9c83-c94f3d7336f7
SCIP notification number (Hungary)	1b7a6121-cbfc-465b-bc5a-d561f6eb0b49
SCIP notification number (Italy)	b46bb5a8-5542-4f08-b090-6b8f891a1722
SCIP notification number (Netherlands)	e811e010-5a41-4695-8e23-761ff34bb5ef
SCIP notification number (Poland)	ec1d72b5-b6a1-4881-8048-b5df42271a43
SCIP notification number (Romania)	0ce4384e-f384-4da3-bae9-6883570ddfa0
SCIP notification number (Sweden)	f21b05b7-cc0a-4c7a-8442-83c93f183d41



Approvals / Certificates

General approvals

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 294-4375

↓

Documentation

Additional Information

Technical Section

pdf
2240.62 KB

↓

Bid Text

294-4375	19.02.2019	xml 5.60 KB	↓
294-4375	13.06.2017	doc 28.50 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models
294-4375

↓

CAE data

WSCAD Universe
294-4375

↓

ZUKEN Portal
294-4375

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



Item No.: 294-370 Strain relief; for 294 Series; with snap-in mounting feet; white	Item No.: 294-375 Strain relief; for 294 Series; without snap- in mounting feet; white
---	---

1.1.1.2 Strain relief plate



Item No.: 294-364

Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white



Item No.: 294-384

Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool

1.1.2.2 Operating tool




Item No.: 206-294


Disconnection tool; green

Installation Notes


Installation



5-pole – with snap-in ground contact, d = 4.9 mm




Mounting hole for screw
Notice: The maximum thread diameter for self-tapping screws is 3 mm.




Hole for screw mount
Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Conductor termination




EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ³ *s, str, f-str*
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str*
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ³ *str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring
with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

