

Rail & Trunk System - Electronic inserts
RTS 1500MM 50W 5-WIRE NR WHITE
0042579



Product features

- RTS LED linear luminaire for industrial and commercial applications. 1500 mm length with narrow optics provide homogenous light distribution for aisles and focus areas. Steel housing, White color, -20 ... +30 °C operating temperature range, 4000 K, CRI 80, 3 SDMC. 50 W power consumption, 8000 lm luminous flux, 160 lm/W efficacy, 1500 mm x 70.2 mm x 78.6 mm (L x W x H) dimensions, IP20, IK03, 220-240 V 50/60 Hz, Class I. Lifespan L70:B50 120,000 hours.




PRODUCT OVERVIEW

Product name	RTS 1500MM 50W 5-WIRE NR WHITE
Technology	LED
Cap/Base	N/A
Housing	Steel
General application	Logistics & Industry
ETIM Class	EC000986
Warranty	5 years
Useful luminous flux (Fuse)	8000
Fixture luminous flux (lm)	8000
Luminaire efficacy (lm/W)	160
Correlated colour temperature (k)	4000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	25
Photobiological Risk Group	RG1
Total power consumption (W)	50
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288425795

PHOTOMETRY

Rail & Trunk System - Electronic inserts
RTS 1500MM 50W 5-WIRE NR WHITE
0042579

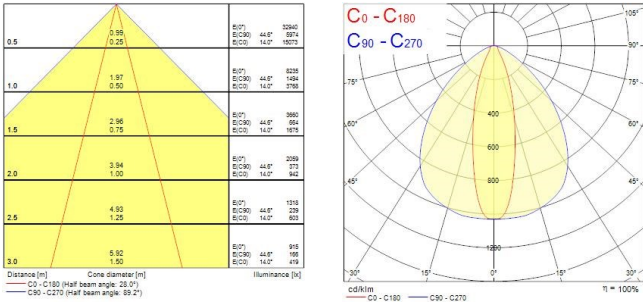

TECHNICAL DRAWINGS

