




Features

- Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 41000lm, 300W, 137lm/W, CRI70, Asymmetrical Wide beam angle (65° x 120° imax@55°), 100000 hrs L90B10 lifespan, 567 x 465 x 97mm (LxWxD) dimensions, 9.6kg weight.

Product Overview

| | |
|-----------------------------------|-----------------------------------|
| Product name | Start Flood IP66 42000lm 740 ASYM |
| Technology | LED |
| General application | Logistics & Industry |
| ETIM Class | EC001744 |
| E-number FI | 4579467 |
| Fixture luminous flux (lm) | 41000 |
| Luminaire efficacy (lm/W) | 137 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 70 |
| Beam Angle (°) | 65*120 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 300 |
| Electrical protection | Class I |
| IP rating | IP66 |
| IK rating | IK08 |
| Product EAN number | 5410288482156 |
| Warranty | 5 years |
| Useful luminous flux (#use) | 41000 |

Photometry

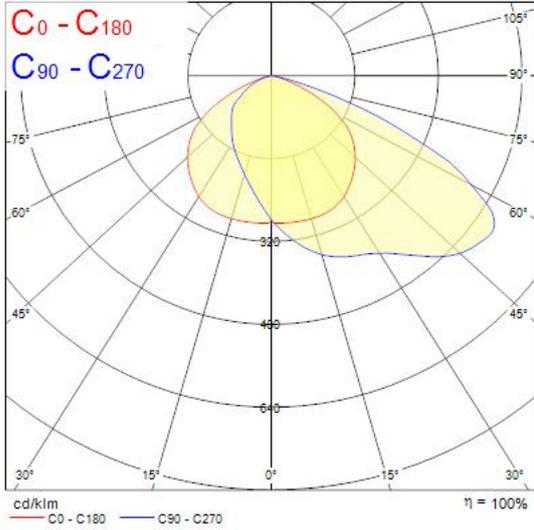

Technical drawings

