


SPIROTECH SPECIFICATION SHEET MultiControlModular S0.3-16.0		SPIROTECH 
Customer:		Type: EMCM-S0.3-16.0
Project:		
Reference:		

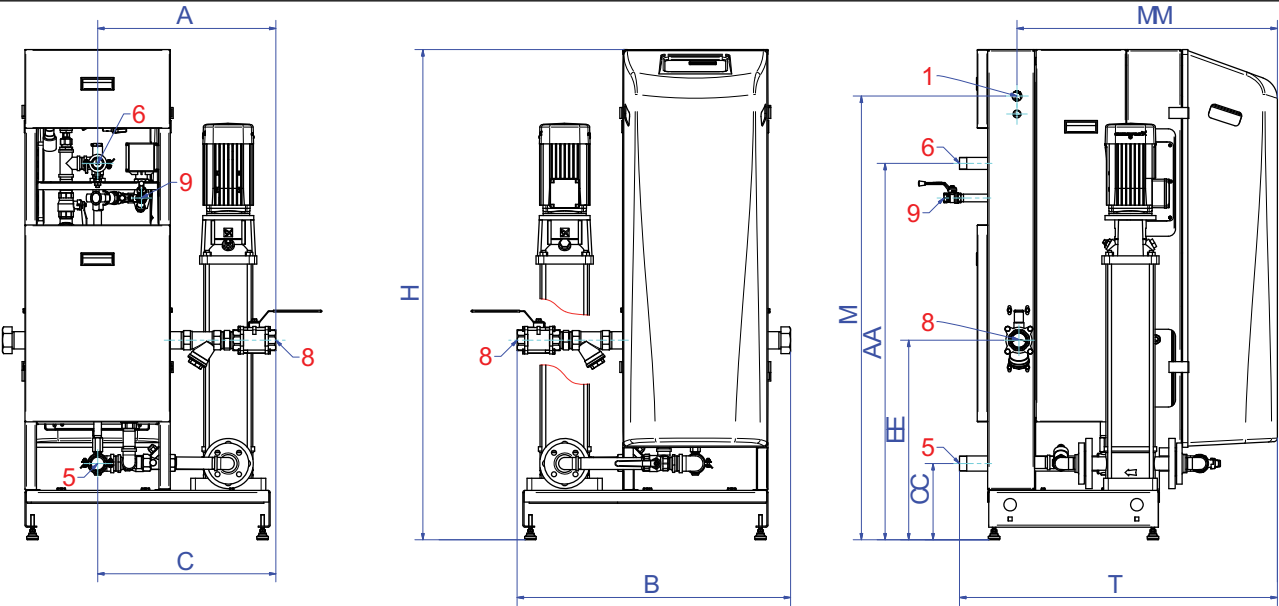

Design criteria		Dimensions	
Medium:	Water / glycol (max 40%)	Height:	1370 mm
Min. Pressure:	8.0 bar-g	Width:	764 mm
Discharge:	16.0 bar-g	Depth:	888 mm
Max. pressure:	25.0 bar-g	A	498 mm
Max. temperature:	70 °C	AA	1240 mm
Ambient temperature:	0 - 40 °C	B	764 mm
Refill fluid:	0 - 70 °C	C	498 mm
Testing and quality assurance		CC	213 mm
Running test:	yes	EE	558 mm
Test medium:	Water	H	1370 mm
High voltage test:	yes	M	1240 mm
Test certificate:	no	MM	728 mm
CE-marking:	yes	T	888 mm
Material certificates:	no	Dry weight (approx):	140 kg
Construction materials		Connections	
Fittings / pipes:	Copper/Brass	1. Refill	Rp1/2
Pump:	AISI316	5. suction pipe	R5/4
Main pump:	Vertical multistage	6. overflow pipe	R1
	1 x 100%	8. Exp. pressure pipe	Rp6/4
Overflow valve(s)	1 x 100%		
Casing:	Galvanised steel plate		
Color:	Yellow (RAL 1003)		
Power supply			
Voltage:	[3x] 400V~/50Hz		
Power consumption:	1.3 kW		
Protection level:	IPX4D		

Subject to changes