


# Walraven RapidStrut® Rail X-Connector G2 (BUP1000)

(H28110)

to make Strut rail fabrications

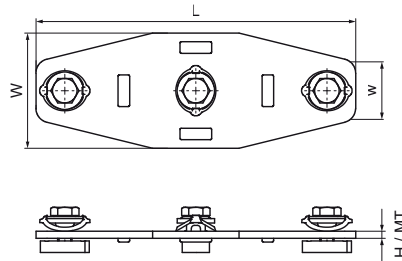

## Features & benefits

- connector with pre-assembled Walraven RapidStrut® Slide nut(s)
- to make fabrication with Walraven RapidStrut® Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- 'Direct Twist' technology for easy and secure installation
- visual guide to check the position of the slide nut
- optimized for easy installation with electrical tools
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- product is part of the Walraven Walraven UltraProtect® 1000 system
- suitable for in- and outdoor applications
- stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Product Number   | For Rail Type                     | Total Height | Total Width | Total Length | Material Thickness | Width | Torque Moment For Installation | Maximum Allowed Load Faz | Maximum Allowed Load Fax |
|------------------|-----------------------------------|--------------|-------------|--------------|--------------------|-------|--------------------------------|--------------------------|--------------------------|
| Reference Letter |                                   | H            | W           | L            | MT                 | w     | T <sub>inst.</sub>             | F <sub>a,z</sub>         | F <sub>a,x</sub>         |
| Unit description |                                   | mm           | mm          | mm           | mm                 | mm    | Nm                             | N                        | N                        |
| 665885223        | 41x21, 41x41, 41x51, 41x62, 41x82 | 31.4         | 80          | 222          | 5.00               | 40    | 40                             | 4,000                    | 2,270                    |