

Lightning and Overvoltage Protection
ProTec T1 3+0
 Class I • Class II • Type 1 • Type 2 • Type 1CA



Location of Use: Main Distribution Boards
 Network Systems: TN-C
 Mode of Protection: L-PEN
 IEC/EN/UL Category: Class I+II / Type 1+2 / Type 1CA
 Housing: Pluggable Design
 Compliance: IEC 61643-11:2011
 EN 61643-11:2012
 UL 1449 4th Edition

Technical Data

ProTec T1-xxx-3+0(-R)		150	300	350	480	750
IEC Electrical						
Nominal AC Voltage (50/60Hz)	U_o/U_n	120V	240V	277V	400V	600V
Maximum Continuous Operating Voltage (AC)	U_c	150V	300V	350V	480V	750V
Nominal Discharge Current (8/20 μ s)	I_n	20kA	20kA	20kA	20kA	20kA
Maximum Discharge Current (8/20 μ s)	I_{max}	50kA	50kA	50kA	50kA	35kA
Impulse Discharge Current (10/350 μ s)	I_{imp}	12.5 kA	12.5 kA	12.5 kA	10kA	5kA
Specific Energy	W/R	39 kJ/ Ω	39 kJ/ Ω	39 kJ/ Ω	25 kJ/ Ω	6.25 kJ/ Ω
Charge	Q	6.25 As	6.25 As	6.25 As	5 As	2.5 As
Voltage Protection Level	U_p	1000V	1500V	1750V	2100V	3200V
Response Time	t_A	< 25 ns				
Overcurrent Protection (max)		315 A / 250 A gG				250 A gG
Short-Circuit Current Rating (AC)	I_{SCCR}	25 kA / 50 kA				50 kA
TOV Withstand 5s	U_T	175V	337V	403V	581V	871V
TOV 120min	U_T	229V	442V	529V	762V	1143V
	mode	Safe Fail	Safe Fail	Safe Fail	Safe Fail	Safe Fail
Number of Ports		1				

UL Electrical						
Maximum Continuous Operating Voltage (AC)	MCOV	150V	300V	350V	480V	750V
Voltage Protection Rating	VPR	600V	900V	1200V	1500V	2500V
Nominal Discharge Current (8/20 μ s)	I_n	20kA	20kA	20kA	20kA	20kA
Short-Circuit Current Rating (AC)	SCCR	200kA	150kA	150kA	200kA	150kA


Mechanical & Environmental						
Operating Temperature Range	T_a	-40 °F to +185 °F [-40 °C to +85 °C]				
Permissible Operating Humidity	RH	5%...95%				
Altitude (max)		13123 ft [4000m]				
Terminal Screw Torque	M_{max}	39.9 lbf-in [4.5 Nm]				
Conductor Cross Section (max)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)				
Mounting		35 mm DIN Rail, EN 60715				
Degree of Protection		IP 20 (built-in)				
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0				
Thermal Protection		Yes				
Operating State / Fault Indication		Green Flag / Not Green Flag				
Remote Contacts (RC)		Optional				
RC Switching Capacity		AC: 250V/1A, 125V/1A; DC: 48V/0.5A, 24V/0.5A, 12V/0.5A				
RC Conductor Cross Section (max)		16 AWG (Solid) / 1.5 mm ² (Solid)				

Order Information						
Order Code		150	300	350	480	750
ProTec T1-xxx-3+0		59.0029	59.0031	59.0033	59.0035	59.0037
ProTec T1-xxx-3+0-R (with remote contacts)		59.0030	59.0032	59.0034	59.0036	59.0038
ProTec T1-xxx-P (plug)		59.0002	59.0003	59.0004	59.0005	59.0006


Internal Configuration

Legend

- L Line Conductor Terminal
- ⏏ PE/G Conductor Terminal
- RC Remote Contacts Terminal (Optional)
- TD Thermal Disconnect

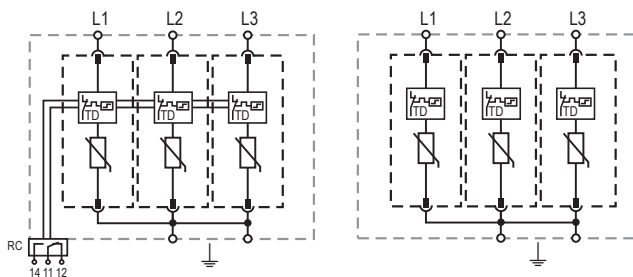

Complete Unit

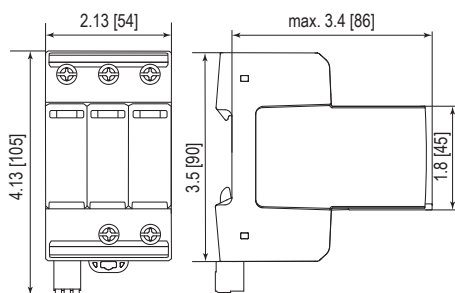


Complete Unit Dimensions & Packaging


		150	300	350	480	750
ProTec T1-xxx-3+0	Weight					
	pounds	1.021	1.100	1.226	1.246	1.265
	grams	463	499	556	565	574
ProTec T1-xxx-3+0-R						
ProTec T1-xxx-3+0-R	Weight					
	pounds	1.041	1.120	1.246	1.265	1.285
	grams	472	508	565	574	583
DIN 43880 Dimension				3 TE / 2.13" [54]		
Packaging Dimensions (HxWxL)				4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]		
Standard Order Quantity				5 Unit		

Plug Internal Configuration

ProTec T1-xxx-P



Spare Plug



Single Unit Dimensions & Packaging

		150	300	350	480	750
ProTec T1-xxx-P	Weight					
	pounds	.203	.229	.271	.278	.284
	grams	92	104	123	126	129
DIN 43880 Dimension				1 TE / .71" [18]		
Packaging Dimensions (HxWxL)				4.3 x 4.5 x 13.8" [109 x 115 x 352 mm]		
Standard Order Quantity				28 Units		

inches
[mm]

Information contained in this document is subject to change at any time without notice.

