



### Features

- Surface mounted ambient luminaire slim architectural design with unique diffuser optic, aluminium housing with acrylic opal diffuser, 1599lm, 20W, 80m/W, 3000K, 700mA, 85 CRI, DALI, IP20, IK02, 50,000 hours (L70), Ø400mm x 54mm, 3 SDCM, 2kg, opal diffuser, Class I, 230-240V


### Product Overview

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Product name                      | GLACE 1599LM HIGH OUTPUT 830 DALI |
| Technology                        | LED                               |
| Cap/Base                          | N/A                               |
| Housing                           | Aluminium                         |
| Mount                             | Ceiling surface mounting          |
| Fixture rating                    | Enclosed                          |
| Environment                       | Indoor                            |
| General application               | Hospitality                       |
| ETIM Class                        | EC002892                          |
| E-number FI                       | 4280805                           |
| Fixture luminous flux (lm)        | 1599                              |
| Luminaire efficacy (lm/W)         | 79.95                             |
| LOR (%)                           | 100                               |
| Correlated colour temperature (k) | 3000                              |
| Light colour                      | Warm White                        |
| CRI (Ra)                          | 80                                |
| Colour Consistency (SDCM)         | 3                                 |
| Glare control                     | < 18                              |
| Total power consumption (W)       | 20                                |
| Electrical protection             | Class I                           |
| Dimmable                          | Yes                               |

## GLACE 1599LM HIGH OUTPUT 830 DALI 2059786

|                           |               |
|---------------------------|---------------|
| Minimum dimming level (%) | 1             |
| Housing colour            | Transparent   |
| IP rating                 | IP20          |
| IK rating                 | IK02          |
| Product EAN number        | 5025768597864 |
| Warranty                  | 5 years       |
| Dimming method            | DALI          |

### Photometry

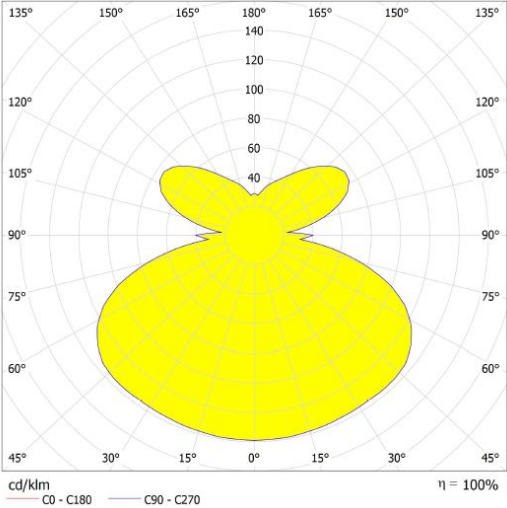

### Technical drawings

