



Features

- Ambient and decorative round, recessed mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1750lm, 14.7W, 119lm/W, 4000K, CRI 80, 1-10V dimmable, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

Product Overview

Product name	GIOTTO 305 4000K RECESSED 1-10V
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
E-number FI	4270183
Fixture luminous flux (lm)	1750
Luminaire efficacy (lm/W)	119
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	14.7
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White

Lumiance

GIOTTO 305 4000K RECESSED 1-10V

3034766

IP rating

IP44

IK rating

IK10

Product EAN number

8711971347668


Warranty

5 years


Colour Code

840

Photometry

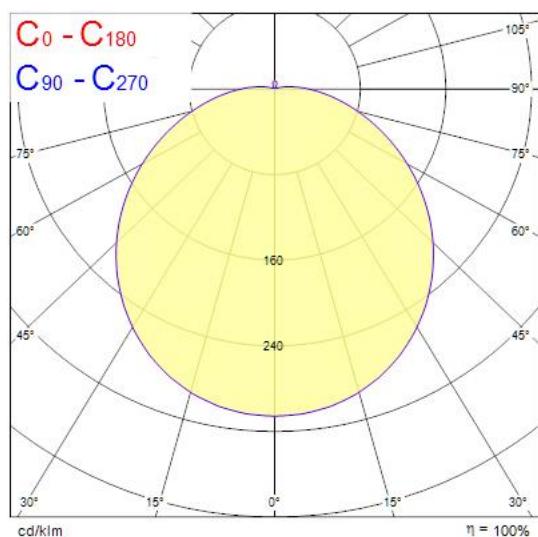

Technical drawings

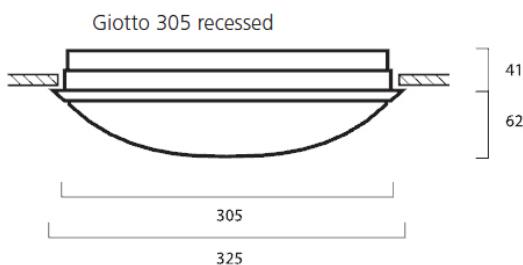

Light your world