

Features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, DALI dimmable, Microwave sensor, 7260lm, 71W, lifespan: 55,000 hours L90B10, A++ A+ A

Product Overview


| | |
|-----------------------------------|--|
| Product name | DELTAWING LED72 DALI MW 4K 1200 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting, Suspended |
| Fixture rating | Enclosed |
| Environment | Internal |
| General application | Education, Hospitality, Logistics & Industry, Office, Retail |
| ETIM Class | EC002892 |
| Fixture luminous flux (lm) | 7260 |
| Luminaire efficacy (lm/W) | 102.25 |
| LOR (%) | 100 |
| Correlated colour temperature (k) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Beam Angle (°) | 102 |
| Glare control | < 25 |
| Photobiological Risk Group | RG0 |

Light your world

DELTAWING LED72 DALI MW 4K 1200 0044899

| | |
|-----------------------------|--------------------|
| Total power consumption (W) | 71 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Minimum dimming level (%) | 5 |
| Housing colour | White |
| IP rating | IP44 |
| IK rating | IK08 |
| Product EAN number | 5410288448992 |
| Warranty | 5 years |
| Dimming method | DALI |

Photometry

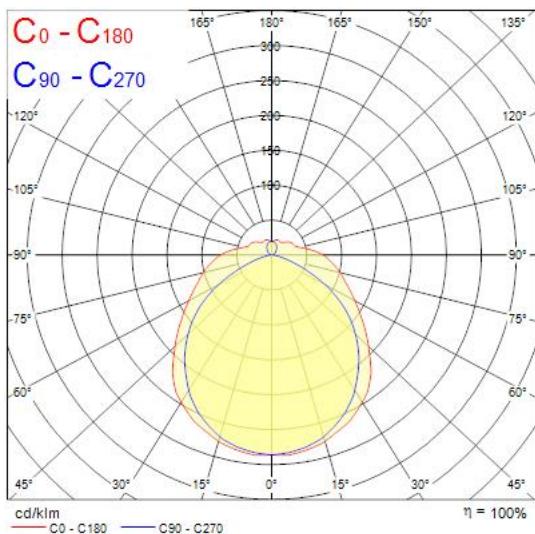

Technical drawings

