



### Features

- Back lit LED recessed panel, 4454lm, 31W, 144lm/W, 4000K, Driver Current 275mA, CRI:80, DALI or Switch Dim, IP40, IK02, UGR<21, zintec powder coated steel body, 55,000hrs (L90B10), HxWxD = 595x595x95mm, 3 step MacAdam Ellipse, Class I, 220-240V.


### Product Overview

|                                   |                           |
|-----------------------------------|---------------------------|
| Product name                      | LYTEPANEL II 600 4K DALI  |
| Technology                        | LED                       |
| Housing                           | Steel                     |
| Mount                             | Ceiling recessed mounting |
| Environment                       | Internal                  |
| General application               | Education, Office         |
| ETIM Class                        | EC002892                  |
| Fixture luminous flux (lm)        | 4454                      |
| Luminaire efficacy (lm/W)         | 143.68                    |
| LOR (%)                           | 100                       |
| Correlated colour temperature (k) | 4000                      |
| Light colour                      | Neutral White             |
| CRI (Ra)                          | 80                        |
| Colour Consistency (SDCM)         | 3                         |
| Beam Angle (°)                    | 120                       |
| Glare control                     | < 21                      |
| Photobiological Risk Group        | RG0                       |
| Total power consumption (W)       | 31                        |
| Electrical protection             | Class I                   |
| Minimum dimming level (%)         | 1                         |
| Housing colour                    | RAL9016                   |

## LYTEPANEL II 600 4K DALI 2059432

|                    |                                |
|--------------------|--------------------------------|
| IP rating          | IP40                           |
| IK rating          | IK02                           |
| Product EAN number | 5025768594320                  |
| Warranty           | 5 years                        |
| Dimming method     | DALI, Switch-dim (mains-rated) |

### Photometry

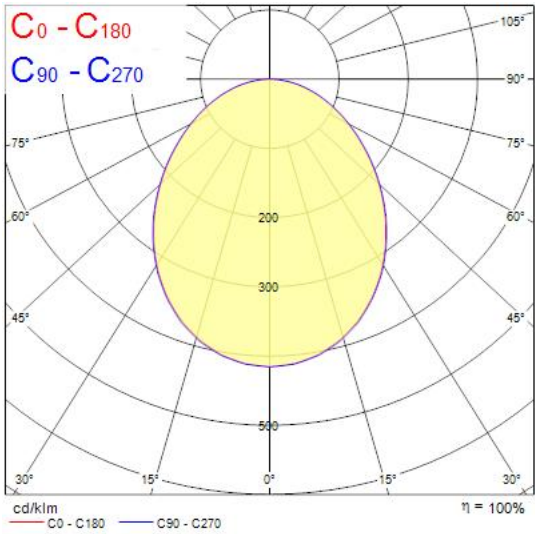

### Technical drawings

