

Accessories


Cable Extender

2-pole & 3-pole Connecting Accessories

Location of Use: SPD Input Terminals

EN Category: Overvoltage Category 3

Compliance: EN 60999-1; Connecting Devices

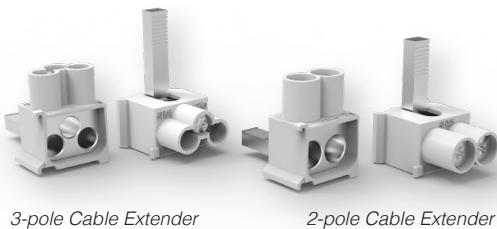

3-pole Cable Extender

2-pole Cable Extender

Technical Data

Cable Extender

2-pole

3-pole

Electrical

Rated Current

100 A

63 A

Rated Voltage

1000 V AC / 1500 V DC

Mechanical & Environmental

Type of Connection

2x25 mm²3x16 mm²

Two Conductors

Three Conductors

Cable Cross Section

2.5 mm² - 25 mm² (Solid, Stranded)1.5 mm² - 16 mm² (Solid, Stranded)2.5 mm² - 16 mm² (Flexible with Ferrule)1.5 mm² - 10 mm² (Flexible with Ferrule)

Terminal Screw Torque

M_{max}

2 Nm (PZ2)

1.2 Nm (PZ1)

Mounting

Direct Mounting between Conductors and Terminals Designed for Copper Wire Only

Pollution Degree

2

Housing Material

PC/ABS, Flame Retardant, Halogen Free

Packaging

Single Product Weight

17 g

15 g

Packaging Dimensions

100 x 900 x 50 mm

Standard Order Quantity

20 Units

Order Information

Cable Extender

2-pole


3-pole

Order Code


515 671

515 672

Dimensions [mm]

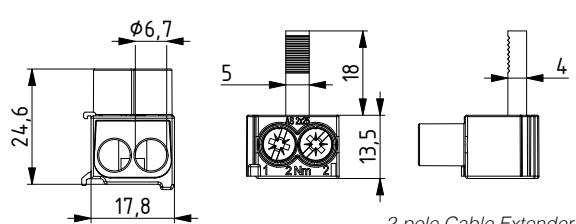

2-pole Cable Extender

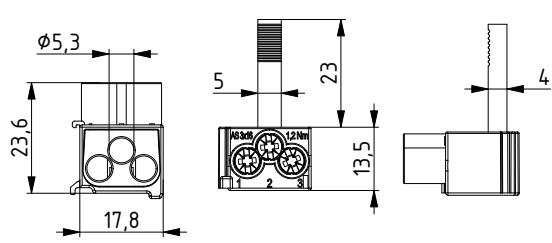

3-pole Cable Extender