



Features

- Logistics and Industry high bay luminaire with wide optics to provide homogenous light distribution for open space areas. 19300lumens, 110W, 175lm/W, 4000K, CRI80, wide beam optic, SylSmart SSA dimmable without PIR motion detection, 3 step MacAdam ellipse, grey finish (RAL7012), Class 1, 220-240V, IP65, IK06.


Product Overview

Product name	KubiXx 4000K 19KLM WIDE SSA N
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Suspended
Fixture rating	Enclosed
General application	Logistics & Industry
ETIM Class	EC001716
Fixture luminous flux (lm)	19300
Luminaire efficacy (lm/W)	175
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 23
Photobiological Risk Group	RG1
Total power consumption (W)	110
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes

KubiXx 4000K 19KLM WIDE SSA N
0062163

Housing colour	Grey
IP rating	IP65
IK rating	IK06
Product EAN number	5410288621630
Warranty	5 years
Dimming method	SylSmart SSA

Photometry

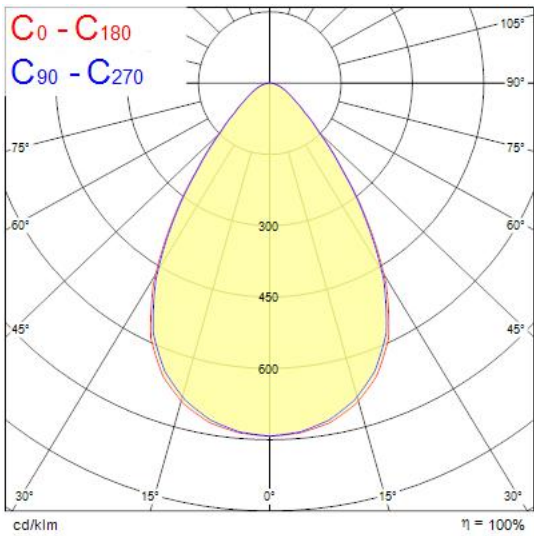

Technical drawings

