



## Features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1750lm, 14.7W, 119lm/W, 4000K, CRI 80, 1-10V dimmable, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.

## Product Overview

<b>Product name</b>	GIOTTO 305 4000K SURFACE 1-10V
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling recessed mounting, Wall surface mounted
<b>Environment</b>	Indoor
<b>E-number FI</b>	4270207
<b>Fixture luminous flux (lm)</b>	1750
<b>Luminaire efficacy (lm/W)</b>	119
<b>Colour temperature (K)</b>	4000
<b>Light colour</b>	Neutral White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	3
<b>Glare control</b>	< 25
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	14.7
<b>Electrical protection</b>	Class I
<b>Control gear type</b>	LED driver constant current
<b>Control gear mounting</b>	Integrated
<b>LED Flickering Rate</b>	Ultra low (5% or less)
<b>Housing colour</b>	White

Light your world

# Lumiance

GIOTTO 305 4000K SURFACE 1-10V

**3034768**

**IP rating**

IP44

**IK rating**

IK10

**Product EAN number**

8711971347682


**Warranty**

5 years

**Colour Code**

840

## Photometry

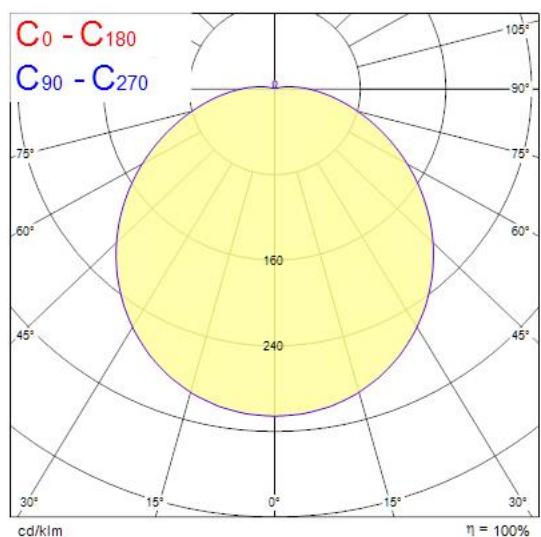

## Technical drawings

Giotto 305 surface mounted

