


Data Sheet | Item Number: 294-5023

Lighting connector; push-button, external; without ground contact; 3-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-5023>



Color: white

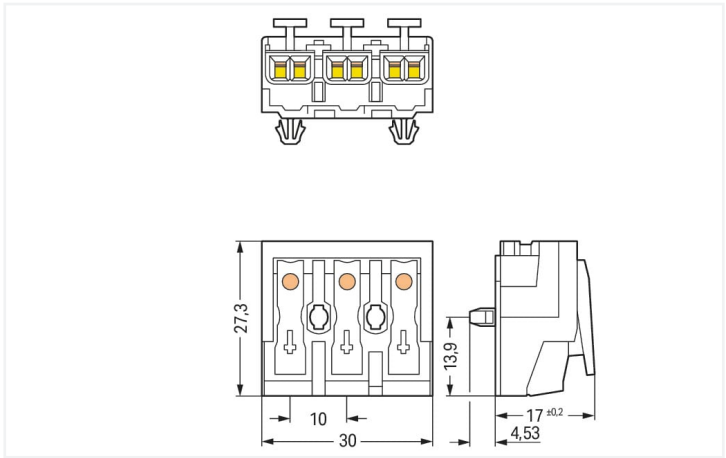

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data									
Ratings per		IEC/EN 60998-1		Ratings per		IEC/EN 60998-2-2			
Overvoltage category		III	III	II	Overvoltage category		III	III	II
Pollution degree		3	2	2	Pollution degree		3	2	2
Nominal voltage		-	-	500 V	Nominal voltage		-	-	500 V
Rated surge voltage		-	-	4 kV	Rated surge voltage		-	-	4 kV
Rated current		-	-	24 A	Rated current		-	-	24 A

Connection data		
Connection points	15	Connection 1 Connection type 1 External 1 Connection technology Push-in CAGE CLAMP® Number of connection points 2 Actuation type Push-button Connectable conductor materials Copper Solid conductor 0.5 ... 2.5 mm² / 18 ... 12 AWG Solid conductor; push-in termination 0.5 ... 2.5 mm² / 18 ... 12 AWG Stranded conductor 0.5 ... 2.5 mm² / 18 ... 14 AWG Fine-stranded conductor 0.5 ... 2.5 mm² / 18 ... 14 AWG Fine-stranded conductor; with insulated ferrule 0.5 ... 1.5 mm² / 18 ... 16 AWG Fine-stranded conductor; with uninsulated ferrule 0.5 ... 1.5 mm² / 18 ... 16 AWG Fine-stranded conductor; with ferrule; push-in termination 0.5 mm² / 18 AWG Strip length 8 ... 9 mm / 0.31 ... 0.35 inches Pole number 3 Wiring direction Side-entry wiring
Total number of potentials	3	
Number of connection types	4	
PE function	without PE contact	



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		30 mm / 1.181 inches
Height		21.53 mm / 0.848 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data	
Marking	N´ - - L´
Mounting type	Snap-in foot

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.183 MJ
Halogen-free	Yes
Weight	9.2 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821098195
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	ed5f8365-c5f4-4906-bd50-bbd0c4aa5d86
SCIP notification number (Belgium)	24f1fdbb-9c13-4ceb-b3a0-072348223f78
SCIP notification number (Bulgaria)	c757f993-2f87-495c-a4c0-bfaf827a88ca
SCIP notification number (Czech Republic)	12515488-935f-417b-8687-f689225fb301
SCIP notification number (Denmark)	1eabc9a0-819e-4675-b2b4-dd6a8402d407
SCIP notification number (Finland)	217118f3-a28e-450a-89c0-7b467a95c041
SCIP notification number (France)	75365a15-3ebe-4d6f-b8f7-edd2cd6b7ba9
SCIP notification number (Germany)	1587dcff-bf57-4a5c-9991-89f40dd55349
SCIP notification number (Hungary)	e6db3ec3-52f7-4a8c-8e19-1f9672f6db44
SCIP notification number (Italy)	a5ff89b8-854b-4f4d-872b-3571474f64db
SCIP notification number (Netherlands)	af0fa8a6-775c-4491-8c69-c1ffff78330a
SCIP notification number (Poland)	3950537e-ec89-4bdb-a02e-17050f9f2c2b
SCIP notification number (Romania)	9d0a1e09-05f8-4af7-bf51-40eb65a07b82
SCIP notification number (Sweden)	c0998c1c-2e05-4bf5-ba5c-26131498a61b



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 294-5023



Documentation

Additional Information
Technical Section
pdf 2240.62 KB



Bid Text
294-5023
19.02.2019
xml 5.58 KB
294-5023
13.06.2017
doc 27.00 KB



CAD/CAE-Data

CAD data
2D/3D Models 294-5023



CAE data
WSCAD Universe 294-5023
ZUKEN Portal 294-5023



1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



[Item No.: 294-370](#)
Strain relief; for 294 Series; with snap-in
mounting feet; white

[Item No.: 294-375](#)
Strain relief; for 294 Series; without snap-
in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool


1.1.2.2 Operating tool




Item No.: 206-294
Disconnection tool; green

Installation Notes


Installation



3-pole – without ground contact




Snap-in foot




Drilled hole for snap-in mounting foot

Conductor termination



EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² "str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors



External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types

