

Concord

GLACE 853LM HIGH EFFICIENCY 830 DALI

2059782



Features

- Surface mounted ambient luminaire slim architectural design with unique diffuser optic, aluminium housing with acrylic opal diffuser, 853lm, 10W, 85lm/W, 3000K, 500mA, 85 CRI, DALI, IP20, IK02, 50,000 hours (L70), Ø400mm x 54mm, 3 SDCM, 2kg, opal diffuser, Class I, 230-240V

Product Overview

| | |
|--|--------------------------------------|
| Product name | GLACE 853LM HIGH EFFICIENCY 830 DALI |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Ceiling surface mounting |
| Fixture rating | Enclosed |
| Environment | Indoor |
| General application | Hospitality |
| ETIM Class | EC002892 |
| Fixture luminous flux (lm) | 853 |
| Luminaire efficacy (lm/W) | 85.3 |
| LOR (%) | 100 |
| Correlated colour temperature (k) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Glare control | < 18 |
| Total power consumption (W) | 10 |
| Electrical protection | Class I |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |


Concord
by SYLVANIA

Concord

GLACE 853LM HIGH EFFICIENCY 830 DALI 2059782

| | |
|--------------------|---------------|
| Housing colour | Transparent |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5025768597826 |
| Warranty | 5 years |
| Dimming method | DALI |

Photometry

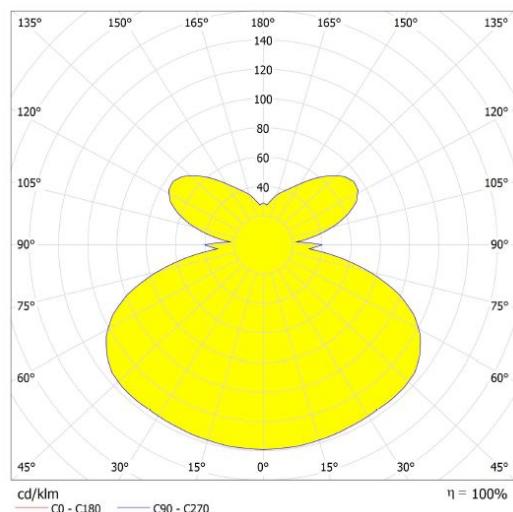

Technical drawings

