

## GLACE 853LM HIGH EFFICIENCY 830 2059780



### Features

- Surface mounted ambient luminaire slim architectural design with unique diffuser optic, aluminium housing with acrylic opal diffuser, 853lm, 10W, 85lm/W, 3000K, 500mA, 85 CRI, non-dimmable, IP20, IK02, 50,000 hours (L70), Ø400mm x 54mm, 3 SDCM, 2kg, opal diffuser, Class I, 230-240V


### Product Overview

Product name	GLACE 853LM HIGH EFFICIENCY 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting
Fixture rating	Enclosed
Environment	Indoor
General application	Hospitality
ETIM Class	EC002892
Fixture luminous flux (lm)	853
Luminaire efficacy (lm/W)	85.3
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 18
Total power consumption (W)	10
Electrical protection	Class I
Dimmable	No
Housing colour	Transparent

## GLACE 853LM HIGH EFFICIENCY 830 2059780

IP rating	IP20
IK rating	IK02
Product EAN number	5025768597802
Warranty	5 years
Dimming method	N/A

### Photometry

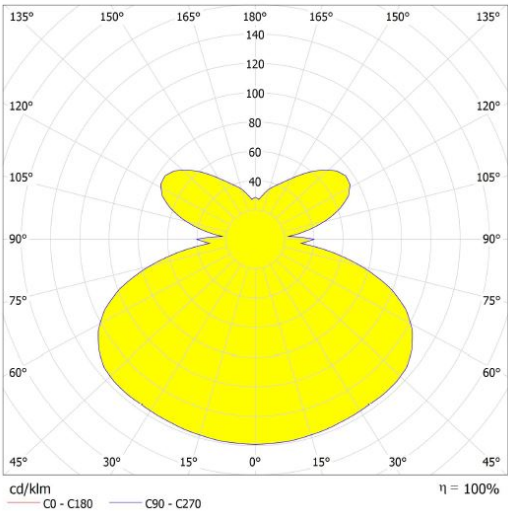

### Technical drawings

