



Features

- Large ambient bulkhead luminaire with indirect halo effect, loop in/loop out wiring, surface or rear cable entry, white polycarbonate housing with opal diffuser, 2216lm, 25W, 89lm/W, 4000K, 640mA, 80CRI, non-dimmable, IP44, IK06, 40,000 hours (L70), Ø430x132mm, 5 SDCM, 1.7kg, Class II, 220-240V, Energy class A++ (integrated LED)


Product Overview

Product name	Clio 430 LED 25W 4000K EB
Technology	LED
Housing	PC Polycarbonate
Mount	Wall surface mounted
General application	Hospitality
ETIM Class	EC002892
E-number FI	4270009
E-number SE	7503267
Fixture luminous flux (lm)	2200
Luminaire efficacy (lm/W)	85
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG1
Total power consumption (W)	26

Clio 430 LED 25W 4000K EB 3079109

Electrical protection	Class II
Dimmable	No
Housing colour	White
IP rating	IP44
IK rating	IK06
Product EAN number	8711971791096
Warranty	4 years
Dimming method	N/A

Photometry

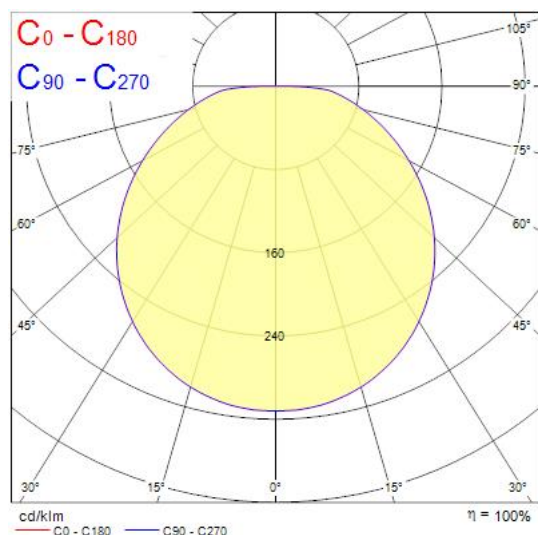

Technical drawings

